



SERVING
SAFETY

Mors Smitt Industrial Technology

Industrial current & voltage sensors

Hall effect current & voltage sensors



SERVING
SAFETY

Mors Smitt Industrial Technology

Industrial sensors



**Closed loop current & voltage sensors meeting
major standards**



Mors Smitt Industrial Technology

Mors Smitt has extended its product portfolio focusing on market sectors like power generation, transmission and distribution, factory automation, petro-chemical, water treatment plants and general industrial requirements.

Industrial sensors

Today, more and more applications that used to be mechanical are changing to fully electronic control offering increased reliability, improved regulation standards and higher energy efficiency.

For motors with inverter control total energy consumed savings of up to 50% are achievable. The inverter control requires reliable, accurate current measurements.

For renewable sources, power electronics also play a key role in energy savings. Modern systems are becoming more complex and require precise coordination between the power semiconductors, the system controller, mechanics and the feedback sensors. The sensors provide all necessary information of the load to fulfill that function.

Other power electronics applications involving sensors are: motor drives, UPS, welding, robotics, cranes, cable cars, ski lifts, elevators, medical systems, power supplies for computer servers and telecom.

Mors Smitt closed loop sensors ensure high accuracy of current measuring in power electronics equipments for a full protection against overload or underload, control and regulation of the power equipment.

Reliability

Worldwide availability is assured by a network of professional, trained and dedicated subsidiaries, distributors and agents, offering local service and support.

Mors Smitt offers customizable protection solutions, enhancing safety and performance. Not just our products and services but also our production sites are focused on environmental performance improvements by certification of the ISO 9001:2008 and ISO 14001 standards.

The company strategy for the future is based upon further responsible development and expansion of its high quality components, responding to tomorrow's needs in the many current sectors it serves. It is based upon putting the skills and talents of its staff to work for company, clients and mankind. Keeping that part of the world's operation for which it plays a role, working successfully, without question and without failure.



Mors Smitt is part of Wabtec Corporation, the NYSE stock exchange listed, global supplier of highly engineered components and solutions for rail and selected industrial markets. Operations in 17 countries and world wide sales in over 100 countries. Wabtec Corporation holds over 1.200 patents and has world class internal processes based on lean manufacturing and continuous improvement principles (Wabtec Performance System).

Within the Wabtec group Mors Smitt has its own name & identity and is focused on satisfying the needs of customers in the power grid, industry and installation sectors.

September 2015

Mors Smitt continuously improves its products and services. Specifications are changed without prior notice. No rights can be derived from specifications in this brochure. Changes and printed errors reserved.

Industrial sensors



Principle

With over 25 years experience in measurement for railway equipment, Mors Smitt introduces a new range of sensors based on closed loop technology, to supply the industry market. These sensors allow measurement of all current waveforms, with high galvanic insulation between the primary and secondary circuits.


Closed loop sensors

The probe placed in the air gap of the magnetic circuit, provides a voltage proportional to this flux. The electronic circuit amplifies the signal from the primary current I_p or voltage U_p flowing across the sensor and generates a current into the secondary I_s .



This secondary current multiplied by the number of turns N_s of secondary winding cancels out the primary magnetic flux that created it. The global flow is equal to zero. The formula $N_p \times I_p = N_s \times I_s$ is true at any time which means the measuring of instantaneous values.

The secondary output current I_s is exactly proportional to the primary current and can be passed through a measuring resistance R_m . The measuring voltage V_m at the terminals of this resistance is therefore proportional to the primary current I_p .


Current sensors

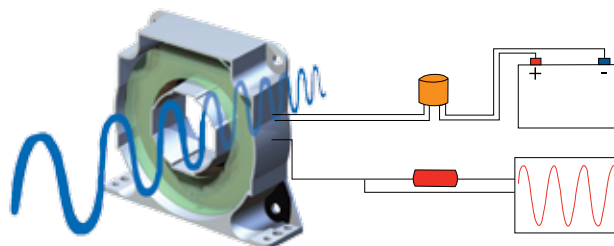

Voltage sensors

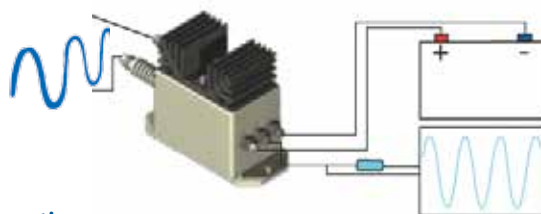

Output connection

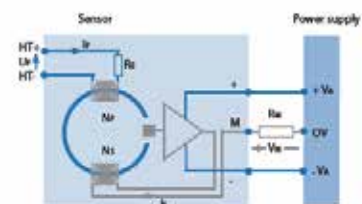

Molex output connector for MSA sensors

M5 output connectors for MSV sensors



High galvanic isolation

Dielectric strength of 3.8 kV...6 kV - 50 Hz -1 min

Measuring of all waveforms

DC, AC, impulse currents

Excellent accuracy, immunity and response time

From $\pm 1.5\%$ to $\pm 0.5\%$ at rated current over $-40\text{ }^{\circ}\text{C}$... $+85\text{ }^{\circ}\text{C}$ with linearity $< 0.1\%$, and over a large frequency from DC to AC and impulse waveforms. Response time $< 1\text{ }\mu\text{s}$

Form fit function

The sensors can be mounted vertically or horizontally and provide form fit functions with other sensors

EMC compliant

All sensors include EMC compliancy

Compliant to major industrial standards

- EN 50178 Electronic equipment for use in power installations
- EN 61000-6-2 Electromagnetic compatibility - immunity for industrial environments
- EN 61000-6-4 Electromagnetic compatibility - emission standard for industrial environments



Dedicated customer service & production


Mors Smitt ensures customer support throughout the product life cycle, moreover we are able to adapt our capacity of production and reactivity to exceed our customer on time delivery and after sales service.

5 year warranty

Mors Smitt return of experience in the railway sector facing the harshest environments and strictest standards allow us to provide our customers a 5 year warranty on all our industrial sensors.

Applications

Motor and renewable energy inverters

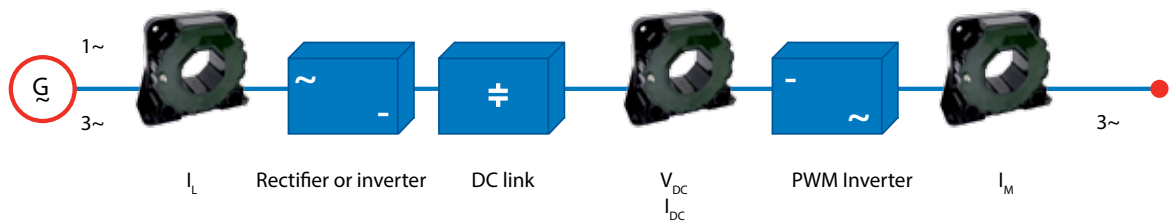


Typical applications:

- Machine tools, printing, paper, textile, plastic
- Steel mills
- Lifts
- Cranes
- Robotics
- Pumps
- Energy inverters for all kind of renewable energies (wind, sun, hydrogen, ocean currents, energy storage etc.)



Uninterruptible power supplies

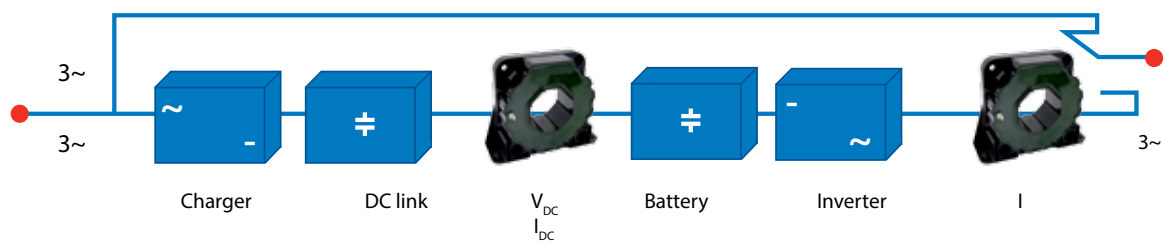


Typical applications:

- EDP systems
- Telecom
- Security systems



Power supplies for welding applications

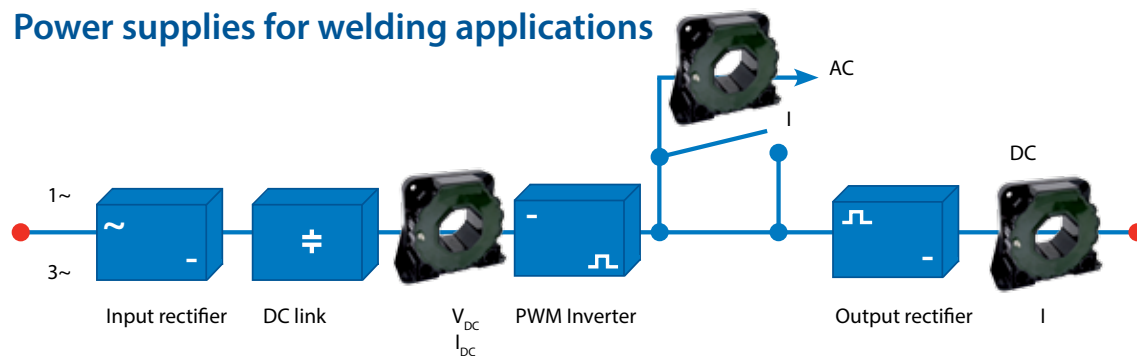


Typical applications:

- Test & measurement in laboratories & universities
- Medical X ray and imaging equipment
- Electrolysis, currents monitoring
- Inductive heating
- Energy management systems, monitoring of load currents
- Overcurrent protection
- Control and safety systems
- Electrical traction



Battery supplied applications

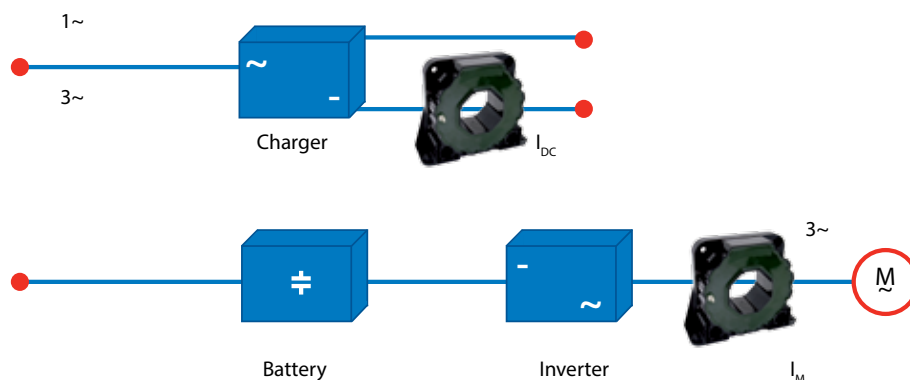

Typical applications:

- Electric vehicles (zero emission vehicles)
- Forklift trucks
- Wheel chairs
- Solar power supplies





Selection guide

Current sensors

				
	MSA 305	MSA 505	MSA 1005	MSA 2005
Primary nominal RMS current (I _{pn})	300 A	500 A	1000 A	2000 A
Primary current measuring range	± 500 A	± 800 A	± 1500 A	± 3000 A
Output measuring resistance (R _m) 70 °C	20 Ω max for 500 A @ 15 V 54 Ω max for 500 A @ 24 V	7 Ω max for 800 A @ 15 V 60 Ω max for 800 A @ 24 V	7 Ω max @ 15 V 25 Ω max @ 24 V	11 Ω max @ 24 V
Secondary nominal RMS current (I _{sn})	150 mA	100 mA	200 mA	400 mA
Conversion ratio ¹	1:2000	1:5000	1:5000	1:5000
Auxiliary supply (V _C)	± 12 V... ± 24 VDC (± 5%)	± 12 V... ± 24 VDC (± 5%)	± 15 V... ± 24 VDC (± 5%)	± 15 V... ± 24 VDC (± 5%)
Current consumption (I _c)	± 20 mA + I _s @ 15 VDC	± 22 mA + I _s @ 15 VDC	± 22 mA + I _s @ 15 VDC	± 33 mA + I _s @ 15 VDC
Dielectric test ¹	3.8 kV	4 kV	4 kV	6 kV
Overall accuracy	± 0.5 % at 25 °C ± 1 % at -40 °C... +85°C	± 0.5 % at 25 °C ± 1 % at -40 °C... +85°C	± 0.5 % at 25 °C ± 1 % at -40 °C... +85°C	± 0.5 % at 25 °C ± 1 % at -40 °C... +85°C
Linearity	< 0.1%	< 0.1%	< 0.1%	< 0.1%
Offset current at I _p = 0 - T _A =25 °C	± 0.25 mA	± 0.25 mA	± 0.25 mA	± 0.25 mA
Response time @ 90% of I _{pn} and di/dt 100 A / μs	<1 μs	<1 μs	<1 μs	<1 μs
Frequency bandwidth (-1 dB)	DC to 100 kHz by technology	DC to 100 kHz by technology	DC to 100 kHz by technology	DC to 100 kHz by technology
Operating temperature	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C
Storage temperature	-50 °C...+90 °C	-50 °C...+90 °C	-50 °C...+90 °C	-50 °C...+90 °C
Secondary coil resistance @ 70 °C	30 Ω	60 Ω	30 Ω	25 Ω
Weight	110 g (± 5%)	210 g (± 5%)	550 g (± 5%)	1550 g (± 5%)
Molex connector ¹	✓	✓	✓	✓
Horizontal / vertical / chassis	✓	✓	✓	✓
5 year warranty	✓	✓	✓	✓

¹ other conversion ratio, dielectric, outputs on request

Voltage sensors

	 MSV 100	 MSV 200				
Primary nominal RMS voltage (I _{pn})	950 V	1000 V	2000 V	3000 V	4000 V	5000 V
Primary current measuring range	± 1400 A	± 1500 A	± 3000 A	± 4500 A	± 6000 A	± 6000 A
Output measuring resistance (R _m) 25 °C	220 Ω max for 1400 V	tba				
Secondary nominal RMS current (I _{sn})	50 mA for 1000 V	50 mA				
Conversion ratio ¹	1000 V / 50 mA	1/5	1/10	1/15	1/20	1/25
Auxiliary supply (V _C)	± 12 V... ± 24 VDC (± 5%)	± 12 V... ± 24 VDC (± 5%)				
Current consumption (I _c)	± 20 mA + I _s @ 15 VDC	± 33 mA + I _s @ 24 VDC				
Dielectric test ¹	3.8 kV	10 kV				
Overall accuracy	± 0.5 % at 25 °C ± 1 % at -40 °C...+85°C	± 0.7 % at 25 °C				
Linearity	< 0.1%	< 0.1%				
Offset current at I _p = 0 - T _A =25 °C	± 0.25 mA	± 0.2 mA				
Response time @ 90% of I _{pn} and di/dt 100 A / μs	<1 μs	<100 μs				
Frequency bandwidth (-1 dB)	DC to 100 kHz by technology	DC to 100 kHz by technology				
Operating temperature	-50 °C...+85 °C	-50 °C...+85 °C				
Storage temperature	-50 °C...+90 °C	-50 °C...+90 °C				
Secondary coil resistance @ 70 °C	60 Ω ± 7%	60 Ω ± 7%				
Weight	500 g (± 10%)	800 g (± 10%)				
Molex connector ¹	✓	✓				
Horizontal / vertical / chassis	✓	✓				
5 year warranty	✓	✓				

¹ other conversion ratio, dielectric, outputs on request

Features

Current sensors

General data

- The housing and insulation resin (UL94 V0) are self-extinguishable upon fire
- Mounting holes are provided in the housing mold for two positions on a base or flat mount through a plate
- Direction of current: a primary current flowing in the direction of the top arrow on the sensor generates a positive secondary output current on terminal M

Primary connection

- Hole for primary conductor
- The temperature of the primary conductor in contact with the housing shall not exceed 100 °C

Secondary connection


- Molex HE14 type connector
- Other output on request

Wiring and mounting instructions

These general instructions are not exhaustive and provide basis for proper installation of the sensors. Each configuration being different, please consult us for particular advice. (Note that non proper installation or incorrect use of the sensor can result in sensor poor performances or malfunction)

Wiring diagram

- Direction of current: a primary current I_p flowing in the direction of the top arrow on the sensor generates a positive secondary output current on terminal M
- Auxiliary supply voltage : bipolar voltage $-VDC \dots 0V \dots +VDC$

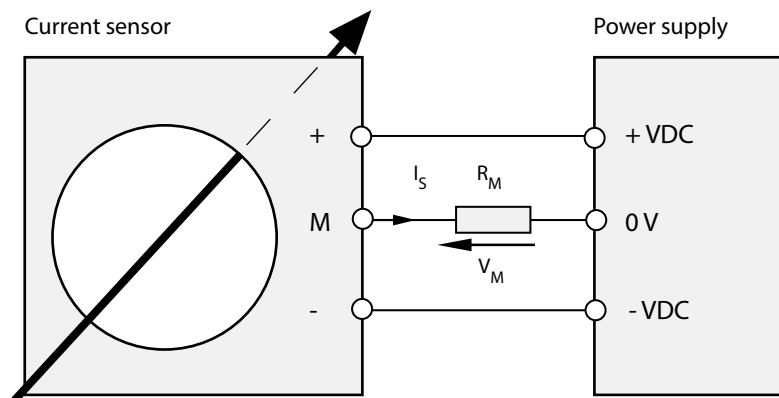

Mechanical mounting

- Any mounting position is possible
- Recommended fixing: by screws and flat washers
- The busbar (or cable) must be centred

Precautions in electromagnetic environment

Due to their principle of operation (measure of magnetic field by the Hall effect probe), closed loop hall effect current sensors can be sensitive to strong magnetic fields. It is recommended to avoid positioning them too close to high current power cables.

Processing of the sensor output signal

Standard codes of practice advise that, before the signal is processed, a low-pass filter adapted to the bandwidth of the sensor is used. Also, in the case of digital processing of the signal, it is also recommended that the sampling frequency is adapted to the bandwidth of both the signal to be measured and the sensor.

In the event of sensor failure, the processing of the output signal should take into account deterioration in performance (i.e. absence of signal or saturated signal) and rapidly and safely shut the system down.

Safety instructions



Our sensors must be used in electrical or electronic equipment with respect to relevant standards and safety requirements in accordance with the manufacturer's operating instructions.

Caution, risk of electrical shock



When operating the sensor, certain parts of the module can carry hazardous voltage (eg. primary terminals, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This sensor is a built-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used. Main supply must be able to be disconnected.

Current sensors

MSA 305-S

300 A , closed loop



Industrial applications, current measuring of all waveforms AC, DC

- Chassis mount
- Closed loop
- High dielectric strength
- Precise linearity
- Precise accuracy
- High dynamic response
- No Foucault losses in the magnetic circuit

Standard

EN 50178
EN 61000-6-2
EN 61000-6-4



Electrical characteristics

Primary nominal RMS voltage	V_{PN}	300 A
Primary voltage measuring range	V_P	± 300 A
Output measuring resistance	R_M	20 Ω max for 500 A @ 15 V 70 °C 54 Ω max for 500 A @ 24 V 70 °C

Secondary nominal RMS current	I_{SN}	150 mA
Conversion ratio	K_N	1:2000
Auxiliary supply voltage	V_C	± 12 to ± 20 VDC ± 5 %
Current consumption	I_C	± 20 mA + I_s @ 15 VDC
Dielectric strength between: primary and secondary circuit	V_{D1}	3.8 kV - 50 Hz - 1 min

Electrical characteristics

Overall accuracy @ $I_{PN} - T_A = 25$ °C	X_G	± 0.5 %
Overall accuracy @ $I_{PN} - T_A = -40$ °C...+85 °C	X_G	± 1 %
Linearity	E_L	< 0.1 %
Offset current @ $I_p = 0 - T_A = 25$ °C	I_o	± 0.25 mA max
Thermal drift of I_o between -40 °C...+85 °C	I_{OT}	± 1 mA max
Resp. time @ 90% of I_{PN} and di/dt 100 A / μ s	T_r	< 1 μ s
di/dt accuracy followed	di/dt	> 50 A / μs
Frequency bandwidth (-3 dB)	f	DC to 100 kHz by technology


General characteristics

Operating temperature	T_A	-40 °C...+85 °C
Storing temperature	T_S	-50 °C...+90 °C
Secondary coil resistance @ 70 °C	R_S	30 Ω
Weight	m	110 g ± 5 %


Ordering reference

MSA 305-S1

Connections

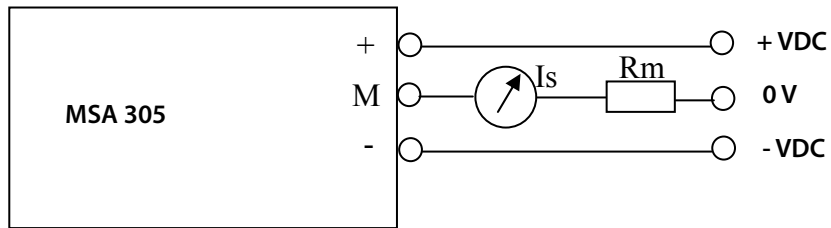

Dimensions

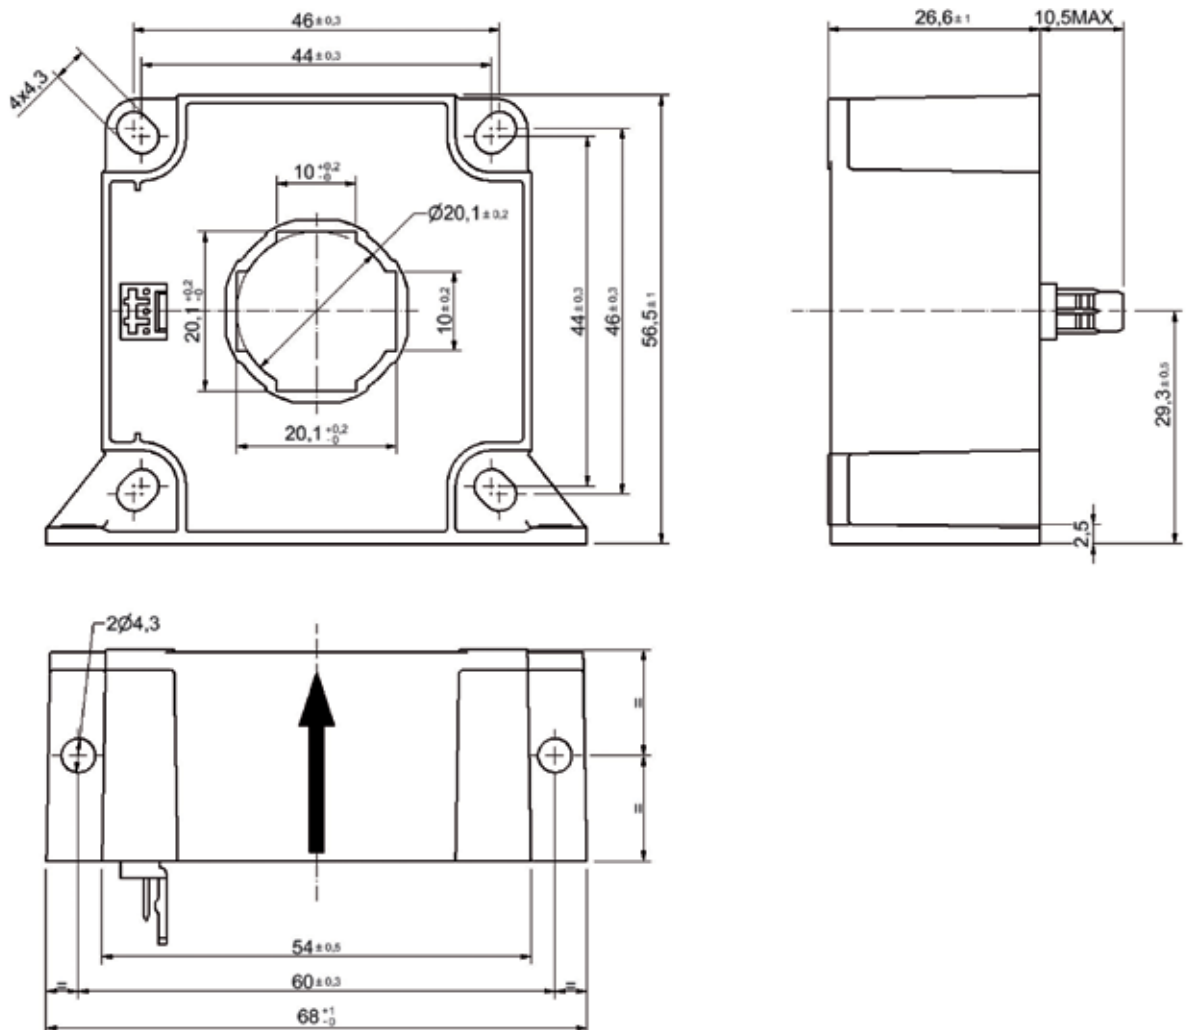

Current sensors

MSA 505-S

500 A , closed loop



Industrial applications, current measuring of all waveforms AC, DC

- Chassis mount
- Closed loop
- High dielectric strength
- Precise linearity
- Precise accuracy
- High dynamic response
- No Foucault losses in the magnetic circuit

Standard

EN 50178
EN 61000-6-2
EN 61000-6-4



Electrical characteristics

Primary nominal RMS voltage	V_{PN}	500 A
Primary voltage measuring range	V_P	± 800 A
Output measuring resistance	R_M	7 Ω max for 800 A @ 15 V 70 °C 60 Ω max for 800 A @ 24 V 70 °C
Secondary nominal RMS current	I_{SN}	100 mA
Conversion ratio	K_N	1:5000
Auxiliary supply voltage	V_C	± 12 to ± 24 VDC ± 5 %
Current consumption	I_C	± 22 mA + I_s @ 15 VDC
Dielectric strength between: primary and secondary circuit	V_{DI}	4 kV - 50 Hz - 1 min

Electrical characteristics

Overall accuracy @ $I_{PN} - T_A = 25$ °C	X_G	± 0.5 %
Overall accuracy @ $I_{PN} - T_A = -40$ °C...85 °C	X_G	± 1 %
Linearity	E_L	< 0.1 %
Offset current @ $I_p = 0 - T_A = 25$ °C	I_0	± 0.25 mA max
Thermal drift of I_0 between -40 °C...+85 °C	I_{OT}	± 1 mA max
Resp. time @ 90% of I_{PN} and di/dt 100 A / μ s	T_r	< 1 μ s
di/dt accuracy followed	di/dt	> 100 A / μs
Frequency bandwidth (-3 dB)	f	DC to 100 kHz by technology


General characteristics

Operating temperature	T_A	-40 °C...+85 °C
Storing temperature	T_S	-50 °C...+90 °C
Secondary coil resistance @ 70 °C	R_S	60 Ω
Weight	m	210 g ± 5 %


Ordering reference

MSA 505-S1

Connections

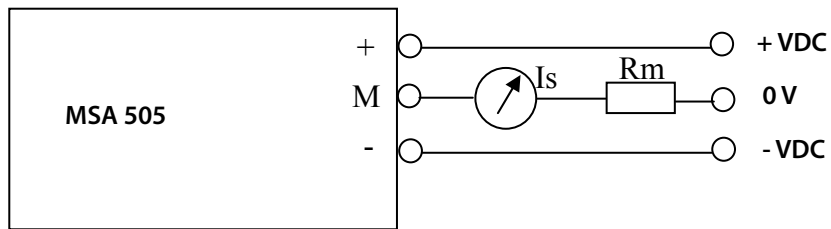


Dimensions

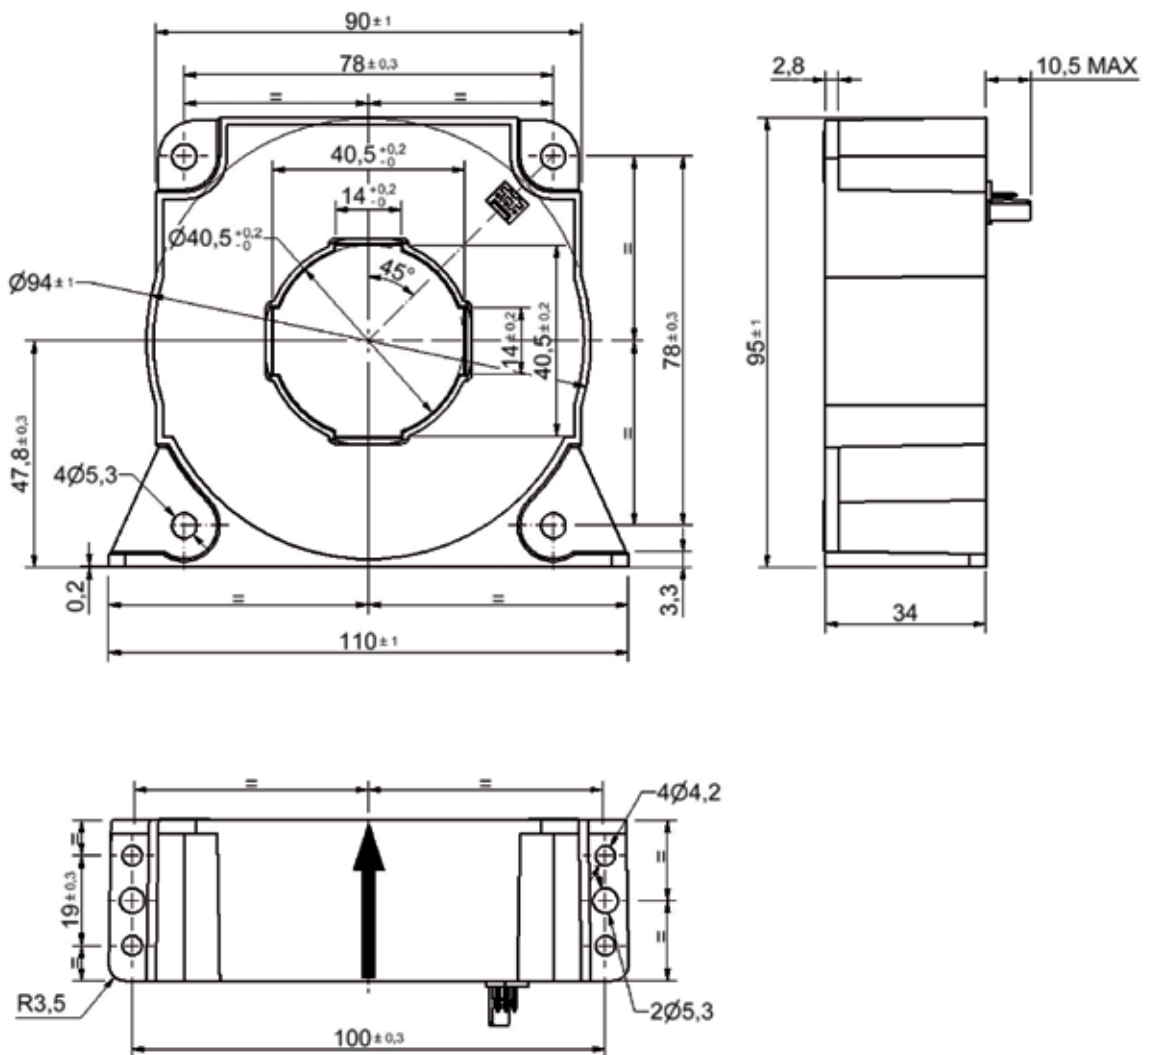

Current sensors

MSA 1005-S

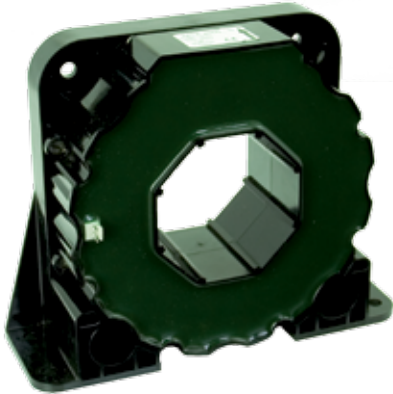

1000 A , closed loop

Industrial applications, current measuring of all waveforms AC, DC

- Chassis mount
- Closed loop
- High dielectric strength
- Precise linearity
- Precise accuracy
- High dynamic response
- No Foucault losses in the magnetic circuit

Standard

EN 50178
EN 61000-6-2
EN 61000-6-4



Electrical characteristics

Primary nominal RMS voltage	V_{PN}	1000 A
Primary voltage measuring range	V_P	± 1500 A
Output measuring resistance	R_M	7 Ω max @ 15 V 70 °C 25 Ω max @ 24 V 70 °C
Secondary nominal RMS current	I_{SN}	200 mA
Conversion ratio	K_N	1:5000
Auxiliary supply voltage	V_C	± 15 to ± 24 VDC ± 5 %
Current consumption	I_C	± 22 mA + I_s @ 15 VDC
Dielectric strength between: primary and secondary circuit	V_{D1}	4 kV - 50 Hz - 1 min

Electrical characteristics

Overall accuracy @ $I_{PN} - T_A = 25$ °C	X_G	± 0.5 %
Overall accuracy @ $I_{PN} - T_A = -40$ °C... 85 °C	X_G	± 1 %
Linearity	E_L	< 0.1 %
Offset current @ $I_p = 0 - T_A = 25$ °C	I_0	± 0.25 mA max
Thermal drift of I_0 between -40 °C... 85 °C	I_{OT}	± 1 mA max
Resp. time @ 90% of I_{PN} and di/dt 100 A / μ s	T_r	< 100 μ s
di/dt accuracy followed	di/dt	> 100 A / μs
Frequency bandwidth (-3 dB)	f	DC to 100 kHz by technology


General characteristics

Operating temperature	T_A	-40 °C... 85 °C
Storing temperature	T_S	-50 °C... 90 °C
Secondary coil resistance @ 70 °C	R_S	30 Ω
Weight	m	550 g ± 5 %


Ordering reference

MSA 1005-S1

Connections

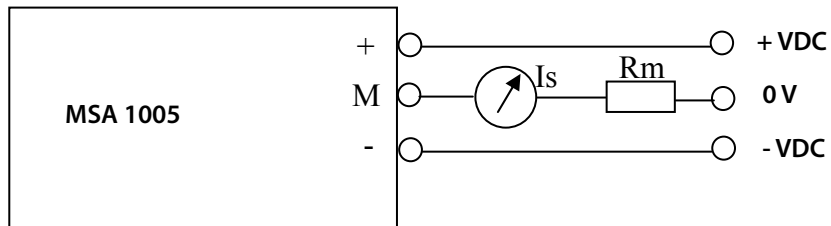

Dimensions

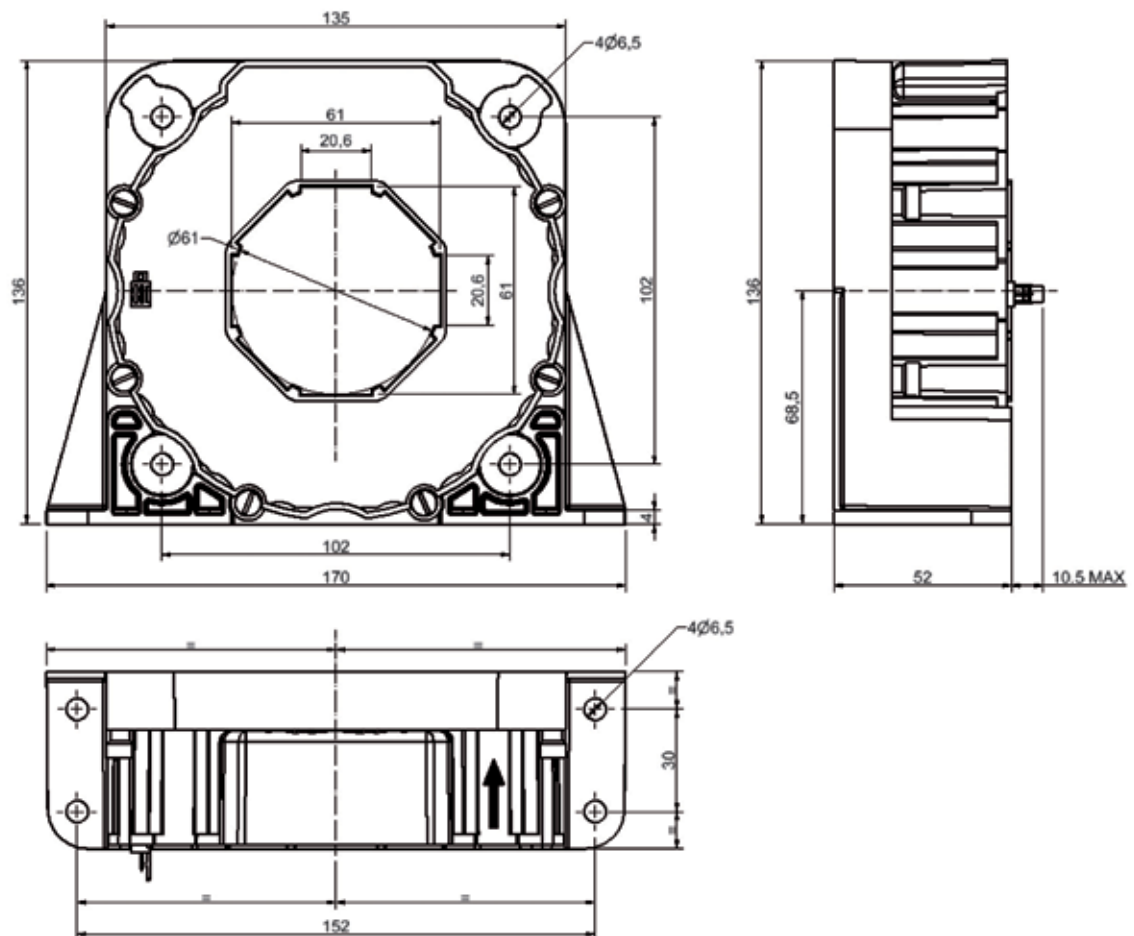

Current sensors

MSA 2005-S

2000 A , closed loop



Industrial applications, current measuring of all waveforms AC, DC

- Chassis mount
- Closed loop
- High dielectric strength
- Precise linearity
- Precise accuracy
- High dynamic response
- No Foucault losses in the magnetic circuit

Standard

EN 50178
EN 61000-6-2
EN 61000-6-4

CE

UL US

Electrical characteristics

Primary nominal RMS voltage	V_{PN}	2000 A
Primary voltage measuring range	V_P	± 3000 A
Output measuring resistance	R_M	11 Ω max @ 24 V 70 °C
Secondary nominal RMS current	I_{SN}	400 mA
Conversion ratio	K_N	1:5000
Auxiliary supply voltage	V_C	± 15 to ± 24 VDC ± 5 %
Current consumption	I_C	± 22 mA + I_S @ 15 VDC
Dielectric strength between:		
primary and secondary circuit	V_{D1}	6 kV - 50 Hz - 1 min

Electrical characteristics

Overall accuracy @ $I_{PN} - T_A = 25$ °C	X_G	$\pm 0.7\%$
Overall accuracy @ $I_{PN} - T_A = -40$ °C... 85 °C	X_G	$\pm 1\%$
Linearity	E_L	$< 0.1\%$
Offset current @ $I_p = 0 - T_A = 25$ °C	I_0	± 0.25 mA max
Thermal drift of I_0 between -40 °C... 85 °C	I_{OT}	± 1 mA max
Resp. time @ 90% of I_{PN} and di/dt 100 A / μ s	T_r	< 100 μ s
di/dt accuracy followed	di/dt	> 100 A / μ s
Frequency bandwidth (-3 dB)	f	DC to 100 kHz by technology


General characteristics

Operating temperature	T_A	-40 °C... 85 °C
Storing temperature	T_S	-50 °C... 90 °C
Secondary coil resistance @ 70 °C	R_S	25 Ω
Weight	m	1550 g $\pm 5\%$


Ordering reference

MSA 2005-S1

Connections

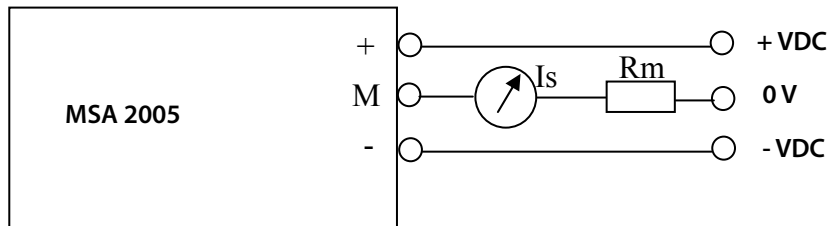

Dimensions

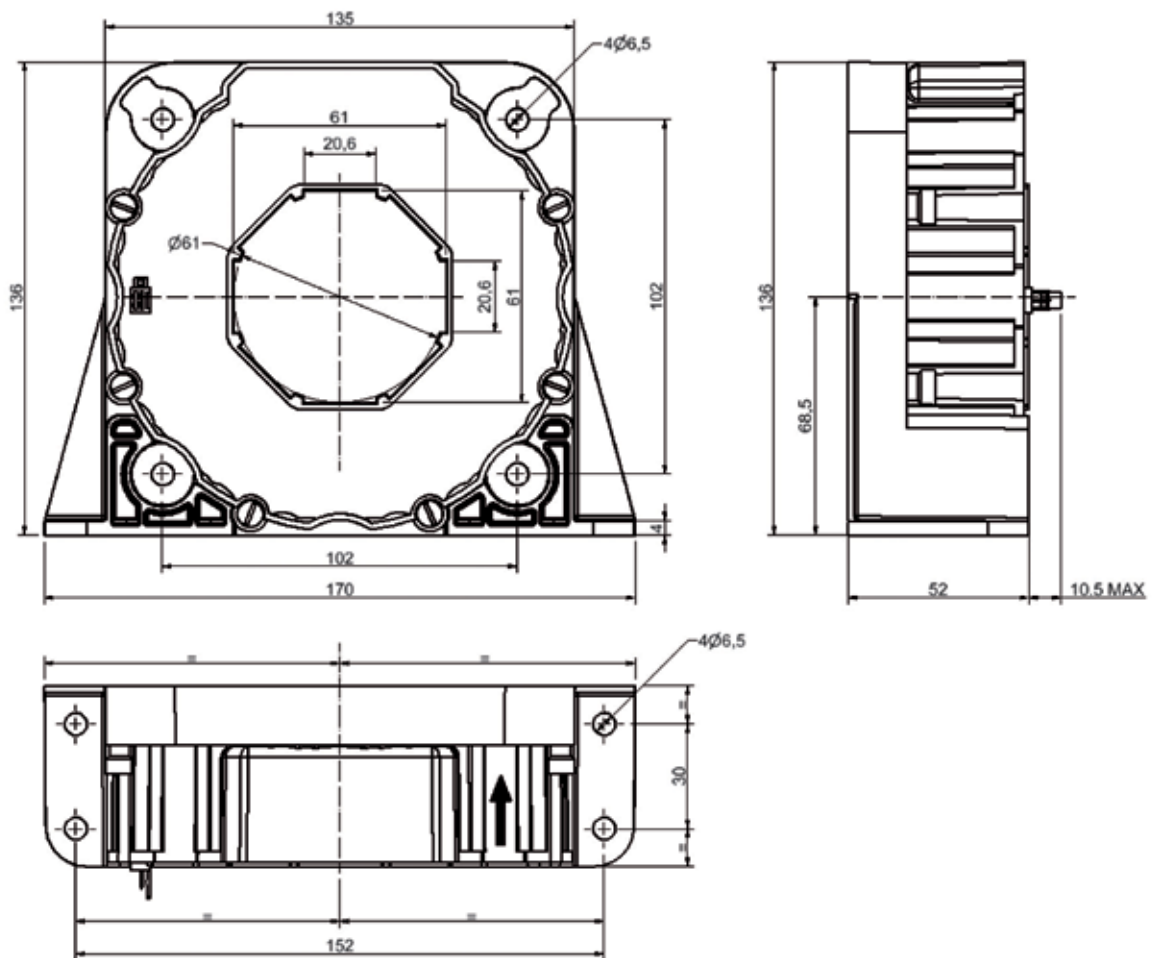

Features

Voltage sensors

General data

- The housing and insulation resin (UL94 V0) are self-extinguishable upon fire
- Mounting holes are provided in the housing mold for base mount, 2 fastening slots of $\varnothing 6.5$ mm
- Direction of current: a positive primary differential potential ($U_{HT+} - U_{HT-} > 0$) generates a positive secondary output current on terminal M
- Power supply is protected against polarity reversal

Primary connection

- Primary 2 x M5 insert
- Tightening torque value 2.2 Nm

Secondary connection


- Secondary 3 x M5 insert
- Tightening torque value 2.2 Nm
- EMC shield optional, other output on request

Wiring and mounting instructions

These general instructions are not exhaustive and provide basis for proper installation of the sensors. Each configuration being different, please consult us for particular advice. (Note that non proper installation or incorrect use of the sensor can result in sensor poor performances or malfunction)

Wiring diagram

- Connect primary voltage V_p to measure to HT+ and HT-
- Auxiliary supply voltage : bipolar voltage $-VDC \dots 0V \dots +VDC$

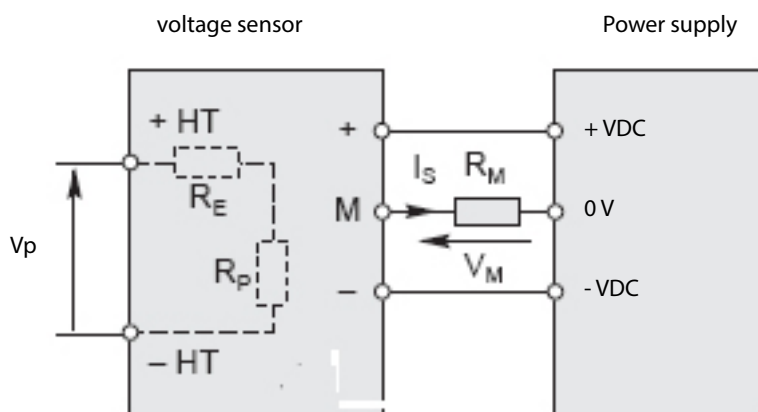

Mechanical mounting

- Base mounting, heatsink on the top or on the side, with fins in vertical position
- Recommended fixing: by 2 x M6 screws with flat washers
- M5 inserts with tightening torque 2.2 Nm for primary and secondary connections

Precautions in electromagnetic environment

Due to their principle of operation (measure of magnetic field by the Hall effect probe), closed loop hall effect current sensors can be sensitive to strong magnetic fields. It is recommended to avoid positioning them too close to high current power cables.

Processing of the sensor output signal

Standard codes of practice advise that, before the signal is processed, a low-pass filter adapted to the bandwidth of the sensor is used. Also, in the case of digital processing of the signal, it is also recommended that the sampling frequency is adapted to the bandwidth of both the signal to be measured and the sensor.

In the event of sensor failure, the processing of the output signal should take into account deterioration in performance (i.e. absence of signal or saturated signal) and rapidly and safely shut the system down.

Safety instructions



Our sensors must be used in electrical or electronic equipment with respect to relevant standards and safety requirements in accordance with the manufacturer's operating instructions.

Caution, risk of electrical shock



When operating the sensor, certain parts of the module can carry hazardous voltage (eg. primary terminals, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This sensor is a built-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used. Main supply must be able to be disconnected.

Voltage sensors

MSV 100



950 V, closed loop

Industrial applications, voltage measuring of all waveforms AC, DC

- Chassis mount
- Closed loop (compensated)
- High dielectric strength
- Precise linearity
- Precise accuracy
- High dynamic response
- No Foucault losses in the magnetic circuit
- EMC shielding (optional)

Standard

EN 50155
IEC 61373
NF F16-101/102
IEC 60068-2-11



Electrical characteristics

Primary nominal RMS voltage	V_{PN}	950 V
Primary voltage measuring range	V_P	± 1400 V
Output measuring resistance	R_M	220 Ω max for 1400 V @ 24 V 70 °C
Secondary nominal RMS current	I_{SN}	50 mA for 1000 V
Conversion ratio	K_N	1000 V / 50 mA
Auxiliary supply voltage	V_C	± 15 to ± 24 VDC ± 5 %
Current consumption	I_C	± 33 mA + I_S @ 24 VDC
Dielectric strength between:		
primary and secondary circuit	V_{D1}	6 kV - 50 Hz - 1 min
shield and secondary circuit	V_{D2}	1.5 kV - 50 Hz - 1 min

Electrical characteristics

Overall accuracy @ I_{PN} - $T_A=25$ °C	X_G	± 0.7 %
Linearity	E_L	< 0.1 %
Offset current @ $I_p=0$ - $T_A=25$ °C	I_0	± 0.2 mA max
Thermal drift of I_0 between -50 °C...+85 °C	I_{OT}	± 1 mA max
Response time @ 90% of V_{PN}	T_r	< 100 μ s
Frequency bandwidth (-3 dB)	f	DC to 100 kHz by technology

General characteristics


Operating temperature	T_A	-50 °C...+85 °C
Storing temperature	T_S	-50 °C...+90 °C
Secondary coil resistance @ 70 °C	R_S	60 Ω ± 7 %
Weight	m	500 g ± 5 %

Ordering reference


MSV 100 MSV100-1-D-2-3-2-N

MSV 100 with EMC shield connection
MSV 100 MSV100-1-D-2-3-2-Y

Connections

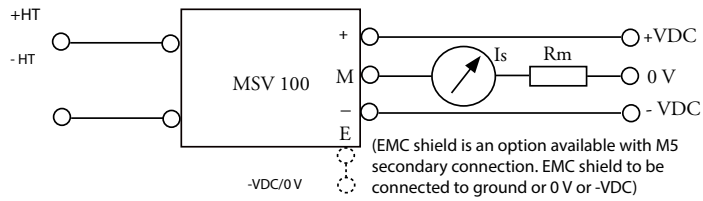

Dimensions

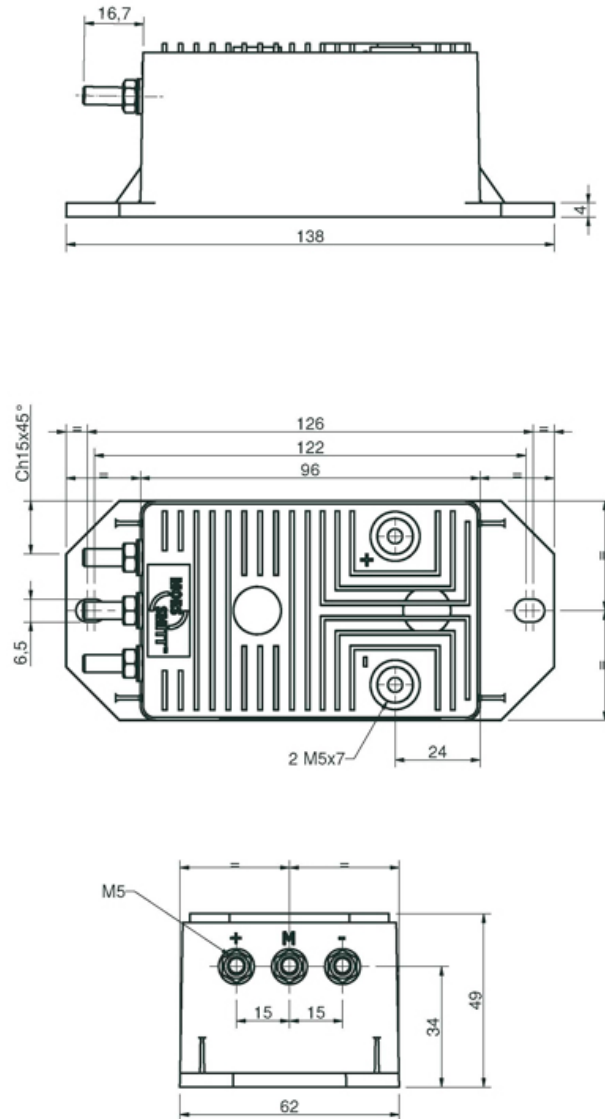

Voltage sensors

MSV 200



1000 V / 2000 V / 3000 V / 4000 V / 5000 V, closed loop

Industrial applications, voltage measuring of all waveforms AC, DC

- Chassis mount
- Closed loop (compensated)
- High dielectric strength
- Precise linearity
- Precise accuracy
- High dynamic response
- No Foucault losses in the magnetic circuit
- EMC shielding (optional)

Standard

EN 50155
IEC 61373
NF F16-101/102
IEC 60068-2-11



Electrical characteristics

Primary nominal RMS voltage	V_{PN}	1000 V / 2000 V / 3000 V / 4000 V / 5000 V
Primary voltage measuring range	V_P	$\pm 1500 V / \pm 3000 V / \pm 4000 V / \pm 6000 V$
Primary resistance @ 25 °C	R_P	100 k Ω
Output measuring resistance	R_M	tba
Secondary nominal RMS current	I_{SN}	50 mA for 1000 V
Primary windings	N_P	10000 / 20000 / 30000 / 40000 / 50000
Secondary windings	N_S	2000
Conversion ratio	K_N	N_P / N_S
Auxiliary supply voltage	V_C	± 15 to ± 24 VDC $\pm 5\%$
Current consumption	I_C	± 33 mA + I_S @ 24 VDC
Dielectric strength between:		
primary and secondary circuit	V_{D1}	6 kV - 50 Hz - 1 min
shield and secondary circuit	V_{D2}	1.5 kV - 50 Hz - 1 min

Electrical characteristics

Overall accuracy @ $I_P = 0 - T_A = 25^\circ C$	X_G	$\pm 0.7\%$
Linearity	E_L	$< 0.1\%$
Offset current @ $I_P = 0 - T_A = 25^\circ C$	I_0	± 0.2 mA max
Thermal drift of I_0 between $-50^\circ C \dots +85^\circ C$	I_{OT}	± 1 mA max
Response time @ 90% of V_{PN}	T_r	$< 100 \mu s$
Frequency bandwidth (-3 dB)	f	DC to 100 kHz by technology

General characteristics

Operating temperature	T_A	$-50^\circ C \dots +85^\circ C$
Storing temperature	T_S	$-50^\circ C \dots +90^\circ C$
Secondary coil resistance @ 70 °C	R_S	$60 \Omega \pm 7\%$
Weight	m	$800 g \pm 5\%$


Ordering reference

MSV 200-1000V	MSV200-1-D-2-3-2-N
MSV 200-2000V	MSV200-2-D-2-3-2-N
MSV 200-3000V	MSV200-3-D-2-3-2-N
MSV 200-4000V	MSV200-4-D-2-3-2-N
MSV 200-5000V	MSV200-5-D-2-3-2-N


MSV 200 with EMC shield connection

MSV 200-1000V	MSV200-1-D-2-3-2-Y
MSV 200-2000V	MSV200-2-D-2-3-2-Y
MSV 200-3000V	MSV200-3-D-2-3-2-Y
MSV 200-4000V	MSV200-4-D-2-3-2-Y
MSV 200-5000V	MSV200-5-D-2-3-2-Y


Connections

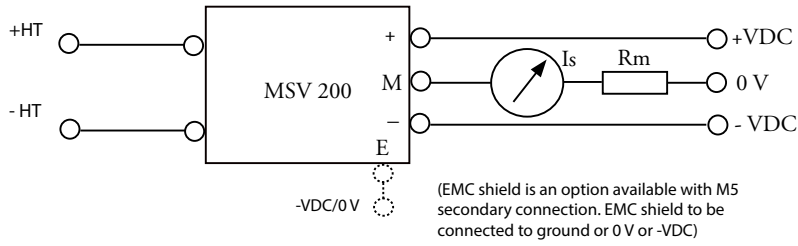

Dimensions

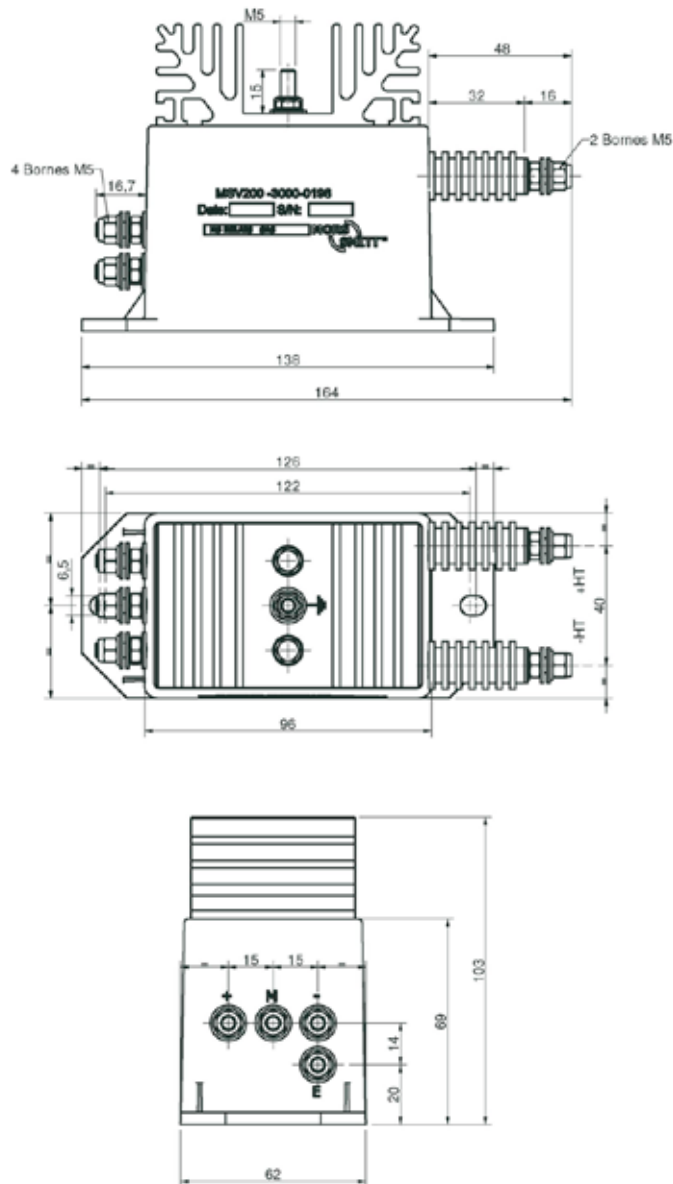

World wide sales network

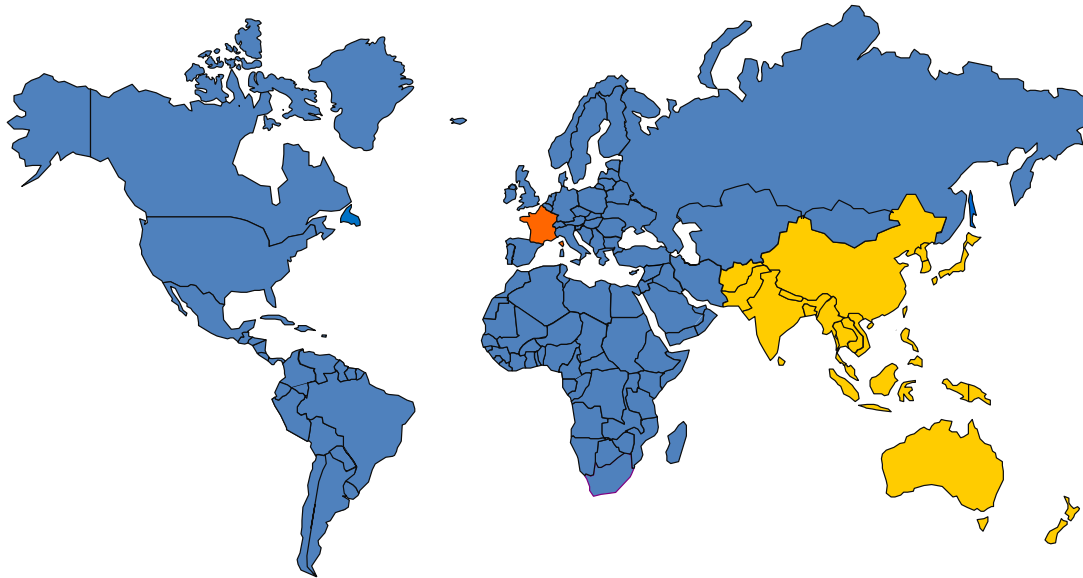

Mors Smitt B.V.

Vrieslantlaan 6
3526 AA Utrecht
The Netherlands

T +31 (0)30 288 1311
F +31 (0)30 289 8816
E sales.msbv@wabtec.com

Mors Smitt France SAS

Tour Rosny 2
Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois
France

T +33 (0)1 4812 1440
F +33 (0)1 4855 9001
E sales@msrelais.com

Mors Smitt Asia Ltd.

807, Billion Trade Centre
31 Hung To Road
Kwun Tong, Kowloon
Hong Kong

T +852 2343 5555
F +852 2343 6555
E info@morssmitt.hk

Mors Smitt brochures are also available on our website: www.morssmitt.com



Heavy duty relays



General purpose relays



Actus relays



Surge protection devices



Industrial sensors

Nieaf-Smitt brochures are also available on our website: www.nieaf-smitt.com



Instruments 1



Instruments 2



SERVING
SAFETY

Mors Smitt Industrial Technology

Industrial sensors

SALES OFFICES

FRANCE

Mors Smitt France SAS
Tour Rosny 2, Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois Cedex, France
T +33 (0) 1 4812 1440
F +33 (0) 1 4855 9001
E sales.msf@wabtec.com

HONG KONG

Mors Smitt Asia Ltd.
29/F., Fun Tower, 35 Hung To Road
Kwun Tong, Kowloon, Hong Kong SAR
T +852 2343 5555
F +852 2343 6555
E sales.msa@wabtec.com

THE NETHERLANDS

Mors Smitt B.V.
Vrieslantlaan 6
3526 AA Utrecht, The Netherlands
T +31 (0)30 288 1311
F +31 (0)30 289 8816
E sales.msbv@wabtec.com


UNITED KINGDOM

Mors Smitt UK Ltd.
Doulton Road, Cradley Heath
West Midlands, B64 5QB, UK
T +44 (0)1384 567 755
F +44 (0)1384 567 710
E sales.msuk@wabtec.com

USA

Mors Smitt Technologies Inc.
1010 Johnson Drive
Buffalo Grove, IL 60089-6918, USA
T +1 847 777 6497
F +1 847 520 2222
E salesmst@wabtec.com

Your local contact



BRO Ind. Sensors V2.3 Sep 2015

www.morssmitt.com

