

TY150/GRP01 - BRB938A - QT2

Datasheet

D.C. Neutral track relay



Description

The relay covered by this data sheet is for use in line circuits where alternating current at industrial frequency may be present in the circuit.


Mors Smitt Relays

- Modular plug in design
- Non weld contacts
- Silver and carbon impregnated with silver contact tips
- Proven reliability
- Low life cycle cost

Specification	Network Rail Acceptance Number	Pin Code (Pins)	Contacts	Rated Voltage	Mors Smitt Reference (Westinghouse Reference)	Mors Smitt Catalogue Number
BRB938A	PA05/04802	101 (A, C, F, G, K)	2F	500 mA D.C.	ST2 (QT2)	TY150/GRP01

Weight	Contact Resistance	Contact Rating	Release	Full Operate	Operate	Coil Resistance	Mors Smitt Catalogue Number
1.4 kg	0.2 Ω	3 A	0.68 x Operate	146 mA	103-117 mA 370-515 mV	4 Ω	TY150/GRP01

Contact Arrangements.

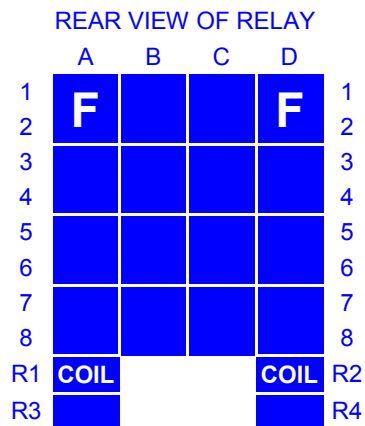

2F

TY152/GRP01

F = Front contact, which is made when the relay is energised. This is a normally open contact.

B = Back contact, which is made when the relay is de-energised and the armature has completed its maximum travel. This is a normally closed contact.



**MORS
SMITT™**



www.morssmitt.com



MS Relais SAS

Tour Rosny 2, Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois Cedex, FRANCE
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001
E sales@msrelais.com

Mors Smitt Asia Ltd.

807, Billion Trade Centre, 31 Hung To Road
Kwun Tong, Kowloon, HONG KONG SAR
T +852 2343 5555, F +852 2343 6555
E info@morssmitt.hk

Nieaf-Smitt B.V.

Vrieslantlaan 6, 3526 AA Utrecht,
NETHERLANDS
T +31 (0)30 288 1311, F +31 (0)30 289 8816
E sales@nieaf-smitt.nl

Mors Smitt Technologies Inc.

420 Sackett Point Road
North Haven, CT 06473, USA
T +1 (203) 287 8858, F +1 (888) 287 8852
E mstechnologies@msrelais.com

Mors Smitt UK Ltd.

Doulton Road, Cradley Heath
West Midlands, B64 5QB, UK
T +44 (0)1384 567 755, F +44 (0)1384 567 710
E info@morssmitt.co.uk