


## /// Plug-in industrial relay with 4 C/O contacts

Rugged plug-in relays for extreme reliability, within long endurance applications and harsh environments

### D-B

Power relay, high DC breaking capacity

*Part of D-platform*

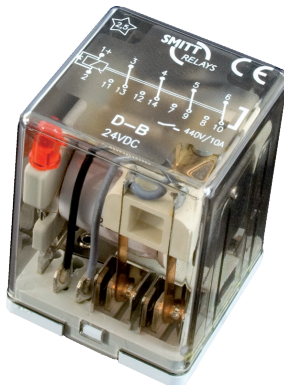

### Description

Plug-in industrial power relay with 4 change-over contacts and magnetic arc blow-out for high DC breaking capacity and long contact life. Standard equipped with a LED indicator and back EMF suppression diode (for DC voltages). Optional double make/double break contacts and increased contact gaps to further increase the breaking capacity and contact life.

Proven reliable operation in switching high DC voltage / inductive loads and low currents. No external retaining clip needed as integrated 'snap-lock' will hold relay into socket under all circumstances and mounting directions.

The construction of the relay and choice of materials make the D-B relay suitable to withstand corrosive atmospheres, low and high temperatures, shock & vibrating and dry to very humid environments.

Compact design, choice of many options and a wide range of sockets makes the D-B relay an easy and flexible solution to use.

### Application

Rugged plug-in relays for extreme reliable, long endurance applications in harsh environment. Proven reliable operation in switching high DC voltage / inductive loads.


These relays are designed for demanding industrial applications such as power utilities and petrochemical industries. With the highly reliable D-relays applications with SIL levels can be achieved.

### Features


- Compact plug-in design
- Instantaneous, 4 C/O contacts
- High DC breaking capacity
- LED indicator
- Back EMF suppression diode (DC versions)
- Flat, square silver plated relay pins for excellent socket connection
- Wide range of sockets for panel, rack or 35 mm rail
- Integrated snap-lock
- Solve-All relay application concept
- Optional positive mechanical keying relay to socket
- Optional trip indicator

### Connection diagram


#### DC-version

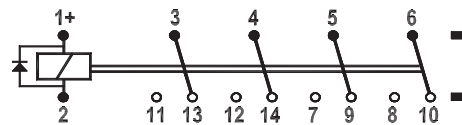

#### AC-version

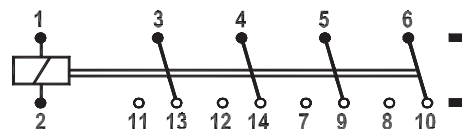

### Timing diagram



### Compliance


IEC 61810  
IEC 60947  
IEC 60947-5-1  
IEC 60255

## Instantaneous relay D-B-relay

### Options

- Magnetic trip indicator
- Magnetic arc blow out
- Lower temperature (-50 °C)
- Au; Gold plated contacts (10 µm)
- Dust protection
- High resistance to welding (AgSnO<sub>2</sub> contacts)
- For safety and vital applications
- Faster switching contacts
- Operating range: 0.7...1.25 Un
- Ambient temperature: -25 °C...+70 °C
- Double make/double break contacts

### Dimensions (mm)

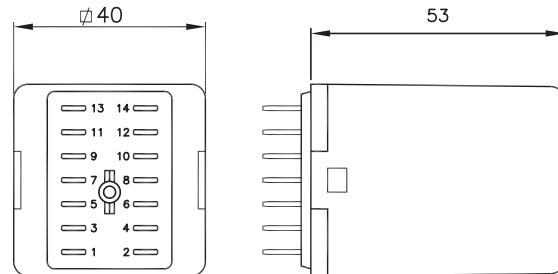

Remark: Not all combinations possible

### Solve-All relay application concept

The unique D relay with all its options has been designed in close cooperation with customers from the power utility industry.

The Solve-All relay application concept offers ultimate flexibility to design and supply tailor made D relays

### Sockets

		Mounting			
		Surface / Wall	35 mm rail	Panel / Flush	PCB
Terminal connection	Screw	V23	V23	-	-
	Screw - wide terminals	V22BR	V23BR	-	-
	Spring clamp	V29	V29	V33	-
	Faston	-	-	V31	-
	Crimp	-	-	V26	-
	Solder tag	-	-	V3	-
	PCB	-	-	-	V32

For more information see the respective datasheets

For more detailed technical specifications, drawings and ordering information, go to the product page on [www.morssmitt.com](http://www.morssmitt.com)

 Over 10 million Mors Smitt relays in use in applications worldwide!

**Mors Smitt Asia Ltd.**  
 Unit B & C, 25/F., Casey Aberdeen House  
 38 Heng Yip Road, Wong Chuk Hang  
 Hong Kong  
 Tel: +852 2343 555  
[sales.msa@wabtec.com](mailto:sales.msa@wabtec.com)

**Mors Smitt France SAS**  
 2 Rue de la Mandinière  
 72300 Sablé-sur-Sarthe, France  
 Tel: +33 (0) 243 92 82 00  
[sales.msfr@wabtec.com](mailto:sales.msfr@wabtec.com)

**Mors Smitt UK Ltd.**  
 Graycar Business Park,  
 Burton on Trent, DE13 8EN, UK  
 Tel: +44 (0)1283 357 263  
[sales.msuk@wabtec.com](mailto:sales.msuk@wabtec.com)

**Wabtec Netherlands B.V.**  
 Vrieslantlaan 6,  
 3526 AA, Utrecht, Netherlands  
 Tel: +31 (0)30 288 1311  
[sales.msbn@wabtec.com](mailto:sales.msbn@wabtec.com)

**Mors Smitt Technologies Ltd.**  
 1010 Johnson Drive,  
 Buffalo Grove, IL 60089-6918, USA  
 Tel: +1 847 777 6497  
[sales.mst@wabtec.com](mailto:sales.mst@wabtec.com)

**RMS Mors Smitt**  
 6 Anzed Court,  
 Mulgrave, VIC 3170, Australia  
 Tel: +61 (0)3 8544 1200  
[sales.rms@wabtec.com](mailto:sales.rms@wabtec.com)

(c) Copyright 2018

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.

## Instantaneous relay D-B-relay

### Technical specifications

#### Coil characteristics DC versions

Operating times at nominal voltage (typical):	
Pull-in time	≤ 20 ms
Release time	≤ 18 ms
Bounce time N/O contacts	≤ 4 ms
Bounce time N/C contacts	≤ 8 ms
Inductance L/R at U <sub>nom</sub> (typical)	
Energized	11 ms
Released	8 ms
Nominal power consumption	2 W at U <sub>nom</sub>
Operating voltage range	0.8 - 1.1 U <sub>nom</sub>

Type	U <sub>nom</sub> (VDC)	U <sub>min</sub> (VDC)	U <sub>max</sub> (VDC)	U <sub>drop-out</sub> (VDC)	R <sub>coil</sub> * (Ω)
6 VDC	6	4.8	6.6	0.6	20
12 VDC	12	9.6	13.2	1.2	72
24 VDC	24	19.2	26.4	2.4	280
30-32 VDC	30-32	24	35.2	3	501
48 VDC	48	38.4	52.8	4.8	1124
60 VDC	60	48.0	66	6	1790
72 VDC	72	57.6	79.2	7.2	3238
100 VDC	100	80	110	10	5500
110 VDC	110	88	121	11	6278
120-125 VDC	120-125	96	137.5	12	8054
220 VDC	220	176	242	22	26422
250 VDC	250	200	275	25	33000

Other types on request

\* The R<sub>coil</sub> is measured at room temperature and has a tolerance of ± 10%

#### Remarks:

- U<sub>min</sub> is the must-operate voltage at which the relay has picked up in all circumstances (worst case situation), in practice the relay picks up at a lower voltage
- U<sub>drop-out</sub> is the must-release voltage at which the relay has dropped-out in all circumstances (worst case situation), in practice the relay drops out at a higher voltage
- Always select the nominal voltage as close as possible to the actual voltage in the application

## Instantaneous relay D-B-relay

### Coil characteristics AC versions

Operating times at nominal voltage (typical):	
Pull-in time	≤ 10 ms
Release time	≤ 5 ms
Bounce time N/O contacts	≤ 4 ms
Bounce time N/C contacts	≤ 8 ms
Nominal power consumption	2 VA at $U_{nom}$
Operating voltage range	0.8 - 1.1 $U_{nom}$

Type	$U_{nom}$ (VAC)	$U_{min}$ (VAC)	$U_{max}$ (VAC)	$U_{drop-out}$ (VAC)	$R_{coil}^*$ (Ω)
6 V 50 Hz	6	4.8	6.6	1.8	3
24 V 50 Hz	24	19.2	26.4	7.2	44
24 V 60 Hz	24	19.2	26.4	7.2	34
42 V 50 Hz	42	33.6	46.2	12.6	133
42 V 60 Hz	42	33.6	46.2	12.6	94
60 V 50 Hz	60	48	66	18	280
110-115 V 50 Hz	110-115	88	126.5	33	1124
110-115 V 60 Hz	110-115	88	126.5	33	736
120-127 V 60 Hz	120	96	132	36	830
127 V 50 Hz	127	101.6	139.7	38.1	1300
220-230 V 50 Hz	220-230	176	253	66	4400
220 V 60 Hz	220	176	242	66	2953
230-240 V 50 Hz	230-240	184	264	69	3300
230-240 V 60 Hz	230-240	184	264	69	4800
380-400 V 50 Hz	380-400	304	440	114	12500
380 V 60 Hz	380	304	418	114	5500

Other types on request

\* The  $R_{coil}$  is measured at room temperature and has a tolerance of  $\pm 10\%$

Remarks:

- $U_{min}$  is the must-operate voltage at which the relay has picked up in all circumstances (worst case situation), in practice the relay picks up at a lower voltage
- $U_{drop-out}$  is the must-release voltage at which the relay has dropped-out in all circumstances (worst case situation), in practice the relay drops out at a higher voltage
- Always select the nominal voltage as close as possible to the actual voltage in the application

## Instantaneous relay D-B-relay

### Contact characteristics

Amount and type of contacts		4 C/O
Peak inrush current (make and carry)	NF F62-002	200 A for 10 ms 40 A for 0.5 s 30 A for 1 s
Maximum continuous current		10 A (AC1; IEC 60947)
Maximum switching voltage		250 VDC, 440 VAC
Minimum switching voltage		12 V (5 V with option E)
Minimum switching current		10 mA (1 mA with option E)
Material		Ag standard (optional AgSnO <sub>2</sub> , Au on Ag)
Contact gap		0.7 mm (up to 4 mm for YX5 option)
Contact force		> 200 mN
Contact resistance		<15 mΩ (initial)

### Electrical characteristics

Dielectric strength	Pole-pole	IEC 61810-1	4 kV, 50 Hz, 1 min
	Cont-coil	IEC 61810-1	2.5 kV, 50 Hz, 1 min
Insulation between open contacts			2.5 kV; 50 Hz; 1 min
Pulse withstanding		IEC 60255-5	5 kV (1.2/50 μs)

### Mechanical characteristics

Mechanical life		DC: 50 million AC: 10 million
Maximum switching frequency		Mechanical: 3600 ops/h Electrical: 1200 ops/h
Weight		140 g (without options)

### Environmental characteristics

Environmental		IEC 61810
Vibration		IEC 61373, Category I, Class B, Body mounted
Shock		IEC 61373, Category I, Class B, Body mounted
Operating temperature		-25 °C...+55 °C (with option C and option Y: -50 °C) -25 °C...+70 °C (with option V)
Humidity		95% (condensation is permitted temporarily)
Salt mist		IEC 60068-2-11, NaCl, 35 °C for 4 days
Damp heat		IEC 60068-2-30, Test method Db variant 1
Protection		IEC 60529, IP40 (relay on socket) (with option K: IP50)
Insulation materials		Cover: polycarbonate Base: polyester

### Industry compliancy

IEC 61810	Electromechanical elementary relays
IEC 60947	Low voltage switch gear and control gear
IEC 60947-5-1	Electromechanical control circuit devices and switching elements
IEC 60255	Relay design and environmental conditions
CE	

## Instantaneous relay D-B-relay


### Options

Available options for D-relay according the *Solve-All* relay application concept

Code	Description	Remark	Can not be combined with
A	Mechanical trip indicator (manually resetable). Indicates if the relay has been energized.		K, L, R4, W
B	Magnetic arc blow-out. Ensures a high DC breaking capacity and longer contact life.		
C	Lower temperature (-50 °C).	Max contact current 8A	
D	Protection against back EMF. When a coil is switched off, a large Back EMF appears across the coil. This back EMF may be several hundred volts in value, enough to destroy a transistor.	Diode standard in DC coil (not necessary to add code D to product code)	
E	Gold plated contacts. Low contact resistance and good resistance against corrosive atmospheres. Suitable for switching low level dry circuit loads.  Gold plated contacts characteristics: Material Ag, 10 µm gold plated Max. switching voltage 60 V (higher voltages may be possible, contact Mors Smitt for more info) Max. switching current 400 mA (at higher rate gold will evaporate, then the standard silver contact rating of minimum 10 mA and 12 V is valid) Min. switching voltage 5 V Min. switching current 1 mA		M
H	High burden protection. Provides immunity to capacitance discharge currents & power. Suitable for application in high security circuit breaker tripping circuits.	Thermistor (PTC) Height relay: 76 mm	A, R, R4, S, T
K	Extra dust protection. Cover sealed with sealant.	IP50 Cat2 for the relay mounted in a Mors Smitt socket!	T
L	LED integrated in coil.	Standard (not necessary to add code L to product code).	A, R, R4, X2
M	AgSnO <sub>2</sub> contacts. Highly resistant to welding, for safety and vital applications.	Min. contact current 100 mA.	E
P	Polarization diode. Protection against reversed polarity.		
Q	Double zener diode. Coil protection against transient voltage.	DC coil only. Max. allowed peak voltage: 180 V. Higher voltage will damage the diode.	
R	Faster switching contacts, pull in time < 7 ms. For reduction of total switching time in critical circuits. Suitable for energy controlling systems. No normally open contact will make below 50 % Unom (guaranteed for temperatures > 20 °C).	DC coil only. 3 C/O contacts. Mechanical life: 1 million operations.	H, L, R4, V, W, X, X2, X3, X4, X5, 11
R4	Faster switching contacts, pull in time < 7 ms. For reduction of total switching time in critical circuits. Suitable for energy controlling systems. No normally open contact will make below 60 % Unom. Input voltage must be a rising edge with - minimum slew rate: 1 V/ms - minimum time: 10 ms	DC coil only. 4 C/O contacts. Integrated polarization and protection diode (option D and P). Mechanical life: 1 million operations.	A, H, L, R, S, V, W, X, X2, X3, X4, X5, Z, 11
S	Mechanical on/off position indicator. (following the contacts) Indicates visual the position of the contacts.		T, W
T	'Push to Test' button. To operate the contact manually.		S, K, W
V	Wider operating range and ambient temperature. Operating range: 0.7 ... 1.25 Unom Ambient temperature: -25 °C...+70 °C	Power consumption 2.22 W @ Unom Operating range AC can differ	R, R4, X5
W	Weld-no-transfer according EN 50205. Non welding contacts for safety critical applications 1 N/C / 3 N/O or 2 N/C / 2 N/O or 3 N/C / 1 N/O.	Option W and Y*	A, R, R4, S, T, X4, X5, 11

## Instantaneous relay

### D-B-relay

Code	Description	Remark	Can not be combined with
X	Bidirectional LED.	Only for DC and in combination with option Z. ZX: no diode, with bidirectional LED	R, R4
X2	Universal AC/DC coil because of rectifier circuit.		L, R, R4
X3	Reversed polarity of coil contacts. Contact 1 = negative (-) and contact 2 = positive (+)		R, R4
X4	Make before break contacts. Contacts 5-7 and 6-8 will make before contacts 3-13 and 4-14 will break. During release, the contacts 3-13 and 4-14 will make before contacts 5-7 and 6-8 will break.	2 N/O and 2 N/C contacts	R, R4, W
X5	Contact gap of 2 mm. Higher DC breaking capacity and longer contact life. To increase the breaking capacity and contact life more this option can be combined with option B and Y.	2 N/O and 2 N/C contacts	R, R4, V, W
Y	Double break / double make contacts. Breaking capacity increased by 50% and longer contact life. To increase the breaking capacity and contact life more this option can be combined with option B and X5.	2 C/O DM/DB contacts -50 °C 	
Z	No diode and no LED.	Polarity independent	R4, W
11	Make before break contacts. Contact 4-12 will make before contact 3-13 will break during pull-in. During release, contact 3-13 will make before contact 4-12 will break. Contact 5-7/9 is a normal change over contact.	1 C/O 1 N/O and 1 N/C contacts	R, R4, W

Coloured cover and keying of relay on socket on request


\* Option W and Y:  
 or 1 N/C, 1 N/O, 1 N/O DM/DB  
 or 1 N/C DM/DB, 1 N/O DM/DB  
 or 1 N/C, 1 N/C DM/DB, 1 N/O

## Instantaneous relay D-B-relay

### Electrical life expectancy and breaking capacity

The life expectancy values shown below are based on factory tests (test frequency at 1/3 Hz). These values could be different in real life applications as environmental conditions, switching frequencies and duty cycles will influence these values. Putting more contacts in series (Y) will increase breaking capacity and life expectancy significantly.


#### Breaking capacity relays (Resistive load DC1)

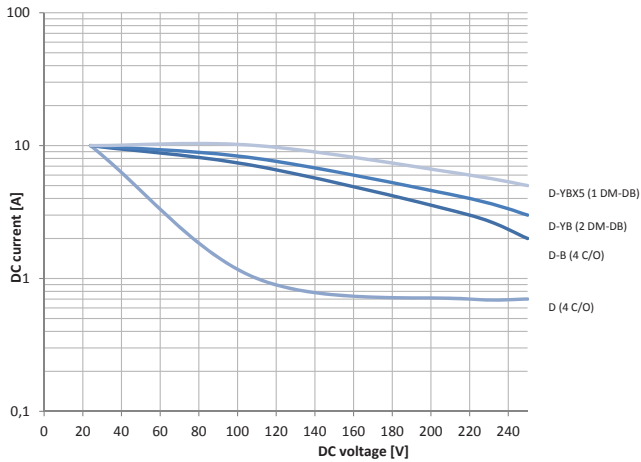

### AC and DC current breaking capacity versus life expectancy in millions of cycles for D-B. Rate of contacts opening and closing = 1200 operations per hour.


AC Current breaking capacity at  $\cos\phi = 1$

Curve	1	2	3	4
VAC	220	125	48	24

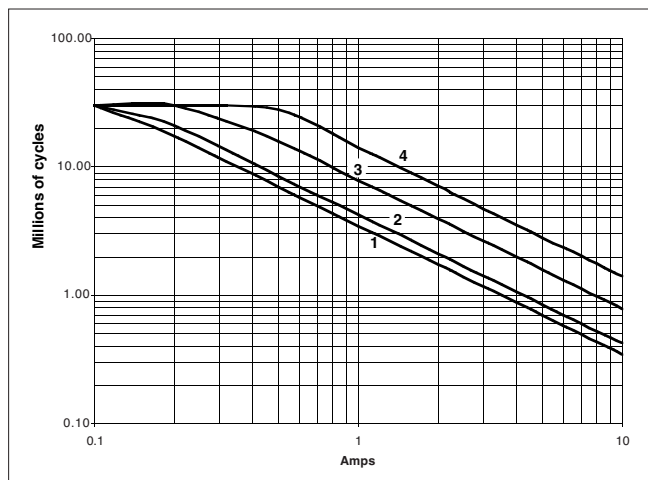

DC Current breaking capacity at L/R = 0

Curve	1	2	3	4
VDC	220	125	48	24






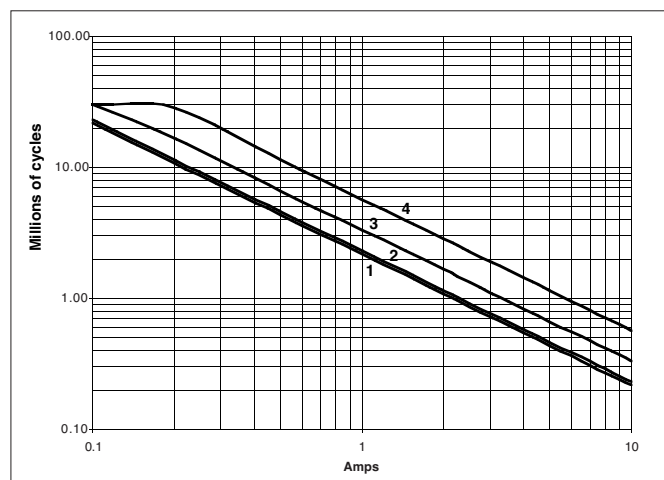


By connecting 2 contacts in series, the DC current breaking capacity is increased by 50%.



## Instantaneous relay D-B-relay

In this section the most common breaking capacity for DC-voltage / inductive load possibilities are presented with the different options and contact configurations within the D-relays series.

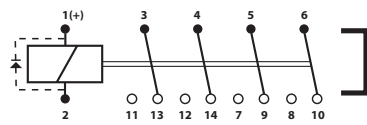D	D-B	D-Y																																																																								
 <ul style="list-style-type: none"> <li>4 C/O contacts</li> <li>Contact gap: 0.7 mm</li> </ul> <p><b>Breaking capacity</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">DC1</td> <td style="width: 15%;">110 VDC</td> <td style="width: 15%;">1 A</td> <td style="width: 15%;"></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>0.7 A</td> <td></td> </tr> <tr> <td>L/R=40 ms</td> <td>110 VDC</td> <td>0.3 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>0.1 A</td> <td></td> </tr> <tr> <td>DC13</td> <td>110 VDC</td> <td>-</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>-</td> <td></td> </tr> </table>	DC1	110 VDC	1 A			220 VDC	0.7 A		L/R=40 ms	110 VDC	0.3 A			220 VDC	0.1 A		DC13	110 VDC	-			220 VDC	-		 <ul style="list-style-type: none"> <li>4 C/O contacts</li> <li>Magnetic arc blow out</li> <li>Contact gap: 0.8 mm</li> </ul> <p><b>Breaking capacity</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">DC1</td> <td style="width: 15%;">110 VDC</td> <td style="width: 15%;">7 A</td> <td style="width: 15%;"></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>3 A</td> <td></td> </tr> <tr> <td>L/R=40 ms</td> <td>110 VDC</td> <td>3 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>1 A</td> <td></td> </tr> <tr> <td>DC13</td> <td>110 VDC</td> <td>-</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>-</td> <td></td> </tr> </table>	DC1	110 VDC	7 A			220 VDC	3 A		L/R=40 ms	110 VDC	3 A			220 VDC	1 A		DC13	110 VDC	-			220 VDC	-		 <ul style="list-style-type: none"> <li>2 C/O contacts</li> <li>Double make double break</li> <li>Contact gap: 1.4 mm</li> </ul> <p><b>Breaking capacity</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">DC1</td> <td style="width: 15%;">110 VDC</td> <td style="width: 15%;">1.5 A</td> <td style="width: 15%;"></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>1 A</td> <td></td> </tr> <tr> <td>L/R=40 ms</td> <td>110 VDC</td> <td>0.5 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>0.2 A</td> <td></td> </tr> <tr> <td>DC13</td> <td>110 VDC</td> <td>-</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>-</td> <td></td> </tr> </table>	DC1	110 VDC	1.5 A			220 VDC	1 A		L/R=40 ms	110 VDC	0.5 A			220 VDC	0.2 A		DC13	110 VDC	-			220 VDC	-	
DC1	110 VDC	1 A																																																																								
	220 VDC	0.7 A																																																																								
L/R=40 ms	110 VDC	0.3 A																																																																								
	220 VDC	0.1 A																																																																								
DC13	110 VDC	-																																																																								
	220 VDC	-																																																																								
DC1	110 VDC	7 A																																																																								
	220 VDC	3 A																																																																								
L/R=40 ms	110 VDC	3 A																																																																								
	220 VDC	1 A																																																																								
DC13	110 VDC	-																																																																								
	220 VDC	-																																																																								
DC1	110 VDC	1.5 A																																																																								
	220 VDC	1 A																																																																								
L/R=40 ms	110 VDC	0.5 A																																																																								
	220 VDC	0.2 A																																																																								
DC13	110 VDC	-																																																																								
	220 VDC	-																																																																								
D-YB	D-BX5	D-YBX5																																																																								
 <ul style="list-style-type: none"> <li>2 C/O contacts</li> <li>Double make double break</li> <li>Magnetic arc blow out</li> <li>Contact gap: 1.4 mm</li> </ul> <p><b>Breaking capacity</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">DC1</td> <td style="width: 15%;">110 VDC</td> <td style="width: 15%;">8 A</td> <td style="width: 15%;"></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>4 A</td> <td></td> </tr> <tr> <td>L/R=40 ms</td> <td>110 VDC</td> <td>5 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>2 A</td> <td></td> </tr> <tr> <td>DC13</td> <td>110 VDC</td> <td>1.5 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>0.5 A</td> <td></td> </tr> </table>	DC1	110 VDC	8 A			220 VDC	4 A		L/R=40 ms	110 VDC	5 A			220 VDC	2 A		DC13	110 VDC	1.5 A			220 VDC	0.5 A		 <ul style="list-style-type: none"> <li>2 N/O + 2 N/C contacts</li> <li>Magnetic arc blow out</li> <li>Contact gap: 2 mm</li> </ul> <p><b>Breaking capacity</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">DC1</td> <td style="width: 15%;">110 VDC</td> <td style="width: 15%;">10 A</td> <td style="width: 15%;"></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>5 A</td> <td></td> </tr> <tr> <td>L/R=40 ms</td> <td>110 VDC</td> <td>6 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>3 A</td> <td></td> </tr> <tr> <td>DC13</td> <td>110 VDC</td> <td>3 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>1 A</td> <td></td> </tr> </table>	DC1	110 VDC	10 A			220 VDC	5 A		L/R=40 ms	110 VDC	6 A			220 VDC	3 A		DC13	110 VDC	3 A			220 VDC	1 A		 <ul style="list-style-type: none"> <li>1 N/O + 1 N/C contacts</li> <li>Double make double break</li> <li>Magnetic arc blow out</li> <li>Contact gap: 4 mm</li> </ul> <p><b>Breaking capacity</b></p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">DC1</td> <td style="width: 15%;">110 VDC</td> <td style="width: 15%;">12 A</td> <td style="width: 15%;"></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>6 A</td> <td></td> </tr> <tr> <td>L/R=40 ms</td> <td>110 VDC</td> <td>7 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>4 A</td> <td></td> </tr> <tr> <td>DC13</td> <td>110 VDC</td> <td>4 A</td> <td></td> </tr> <tr> <td></td> <td>220 VDC</td> <td>2 A</td> <td></td> </tr> </table>	DC1	110 VDC	12 A			220 VDC	6 A		L/R=40 ms	110 VDC	7 A			220 VDC	4 A		DC13	110 VDC	4 A			220 VDC	2 A	
DC1	110 VDC	8 A																																																																								
	220 VDC	4 A																																																																								
L/R=40 ms	110 VDC	5 A																																																																								
	220 VDC	2 A																																																																								
DC13	110 VDC	1.5 A																																																																								
	220 VDC	0.5 A																																																																								
DC1	110 VDC	10 A																																																																								
	220 VDC	5 A																																																																								
L/R=40 ms	110 VDC	6 A																																																																								
	220 VDC	3 A																																																																								
DC13	110 VDC	3 A																																																																								
	220 VDC	1 A																																																																								
DC1	110 VDC	12 A																																																																								
	220 VDC	6 A																																																																								
L/R=40 ms	110 VDC	7 A																																																																								
	220 VDC	4 A																																																																								
DC13	110 VDC	4 A																																																																								
	220 VDC	2 A																																																																								

## Instantaneous relay D-B-relay

### Mounting possibilities/sockets



#### Surface/wall mounting

338000302	V22BR	Screw socket, wall mount, front connection (9 mm terminals)
338000580	V23	Screw socket, wall mount, front connection (7.5 mm terminals)
338000610	V29	Spring clamp socket, wall mount, front dual connection (2.5 mm <sup>2</sup> )

#### Rail mounting

338000580	V23	Screw socket, rail mount, front connection (7.5 mm terminals)
338000402	V23BR	Screw socket, rail mount, front connection (9 mm terminals)
338000610	V29	Spring clamp socket, rail mount, front dual connection (2.5 mm <sup>2</sup> )

#### Panel/flush mounting

338100100	V3	Solder tag socket, panel mount, rear connection
328400100	V26	Crimp contact socket, panel mount, rear connection, A260 crimp contact
338000560	V31	Faston connection socket, rear dual connection (4.8 x 0.8 mm)
338000570	V33	Spring clamp socket, flush mount, rear dual connection (2.5 mm <sup>2</sup> )

#### PCB mounting


338000561	V32	PCB soldering socket
-----------	-----	----------------------

No external retaining clip needed as the 'snap-lock' will hold the relay into the socket under all circumstances and mounting directions (according shock & vibration requirements IEC 61373, Category I, Class B, Body mounted). If regulations require external retaining clips, these are available as well.

For more details see datasheets of the sockets on [www.morssmitt.com](http://www.morssmitt.com)

## Instantaneous relay D-B-relay

### Mechanical keying relay and socket (optional)




**Function:**

- To prevent wrong installation
- To prevent damage to equipment
- To prevent unsafe situations

Using keyed relays and sockets prevents a relay is inserted in a wrong socket. For example it prevents that a 24 VDC relay is put in a 110 VDC circuit. Positive discrimination is possible per different function, coil voltage, timing, monitoring, safety and non-safety.

The D relay socket keying option gives  $8 \times 8 = 64$  possibilities. Upon ordering the customer simply indicates the need for the optional keying. Mors Smitt will assign a code to the relay and fix the pins into the relay. The sockets are supplied with loose key receptacles. Inserting the keys into the socket is very simple and self explaining.

Remark: Sockets and relay shown are examples.

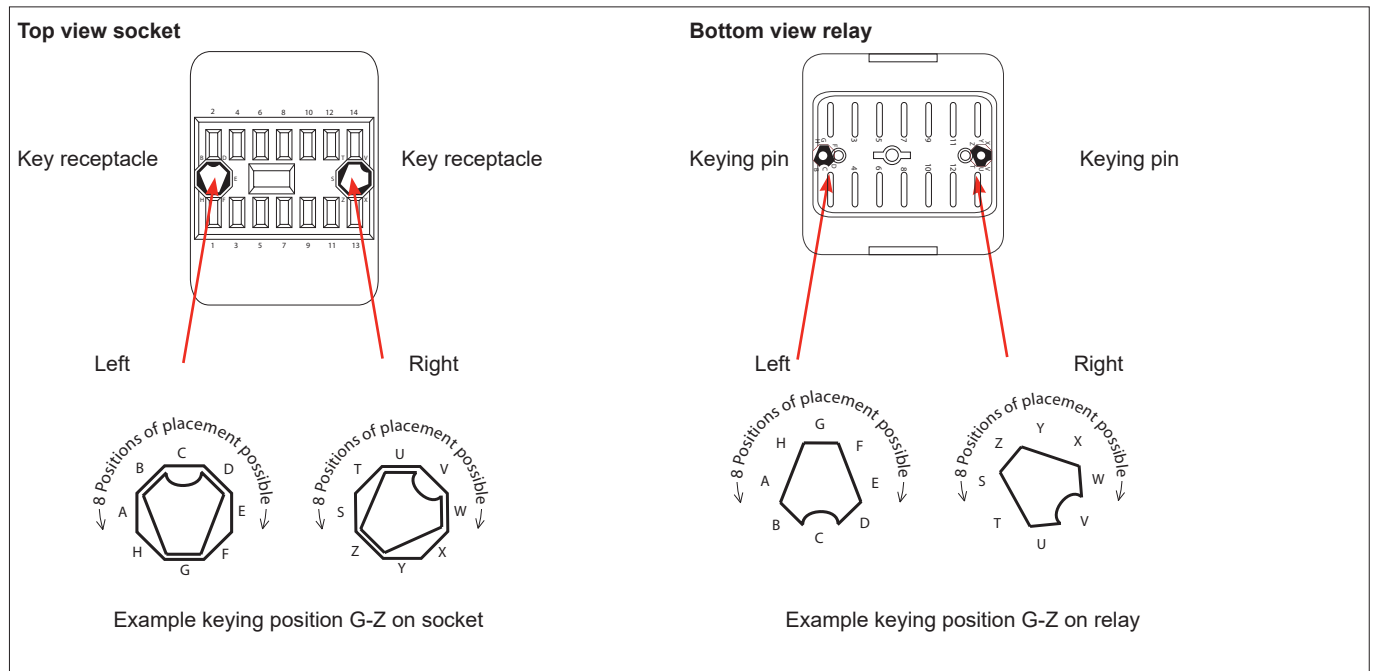

## Instantaneous relay D-B-relay

### Important for relay selection and operation

Make sure the relay is suitable for the application. For critical applications (for example: green loop applications) relays should be checked on correct working during periodic inspection.

### Recommendations for long time contact reliability

For relays to enable failure free performance over a very long operational time, it is important to create the right circumstances. In any relay, contact usage and atmospheric conditions influence the contact surface. To counter this effect it is common practice to use a safety factor of  $> 2$  to ensure long time contact reliability.

Therefore for long time contact reliability we recommend:

- Silver contacts: a minimum contact current of 20 mA per contact
- Gold contacts: a minimum contact current of 10 mA per contact
- Double Make Double Break contacts: a minimum contact current of 40 mA per contact
- When low currents are switched and not frequently, e.g. 10 mA once a day, it is advised next to gold plated contacts to put similar contacts within the same relay in parallel
- With higher load switching, e.g. 110 VDC and  $> 1$  A, put relay contacts in series
- Rule of thumb: any relay works best with switching currents  $> 20$  mA in DC environment when frequently switched. When not switched frequently a higher switching current like 50 mA is better for a long reliable operational time
- Check relays regularly, for example with the Mors Smitt Portable Relay Tester and visually through the transparent cover


### Instructions for use

#### Installation

Before installation or working on the relay: disconnect the power supply first (no hot swapping)! Install socket and connect wiring according to the terminal identification. Plug relay into the socket ensuring there is no gap between the bottom of relay and the socket. Reverse installation into the socket is not possible due to the mechanical blocking snap-lock feature. Check to ensure that the coil connection polarity is not reversed. Relays can be mounted tightly together to save space. When rail mounting is used, always mount the socket in the direction of the UP arrow, to have proper fixation of the socket on the rail.

#### Warning!

- Never use silicon in the proximity of the relays
- Do not use the relay in the presense of flammable gas as the arc generated from switching could cause ignition
- To remove relays from the socket, employ up and down lever movements. Sideway movement may cause damage to the coil wires

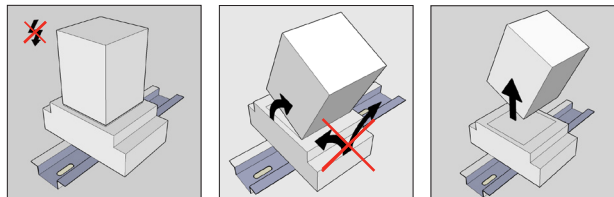

- Relays should never be swapped to other circuit positions when taken out of its socket for inspection or fault finding, always place it back into the original position to prevent contact resistance problems. Contact resistance problems can be created when swapping relays between different circuit loads due the contact wear/condition having changed during its operational life.

#### Operation

After installation always apply the rated voltage to the coil to check correct operation. Long term storage may corrode the silver on the relay pins. When plugging the relay into the socket, the female bifurcated or trifurcated receivers will automatically cut through the corrosion on the pins and guarantee a reliable connection.

Before actual use of relays, it is advised to switch the load several times with the contacts. The contacts will both be electrically and mechanically cleaned due to the positive wiping action. Sometimes a contact can build up increased contact resistance ( $\leq 15$  m $\Omega$  when new). When using silver contacts one can clean the contact by switching a contact load a few times using  $>24$  VDC &  $\sim 2$  A. Increased contact resistance is not always problematic, as it depends on circuit conditions. In general a contact resistance of 1  $\Omega$  is no problem, consult Mors Smitt for more information.

Condensation in the relay is possible when the coil is energised (warm) and the outside, environmental temperature is cold. This is a normal phenomenon and will not affect the function of the relay. Materials in the relay have no hygroscopic properties.

## Instantaneous relay D-B-relay

### Inspection / maintenance

Correct operation of the relay can easily be checked as the transparent cover provides good visibility of the moving contacts. If the relay does not seem to operate correctly, check for presence of the appropriate coil voltage and polarity using a suitable multimeter. If a LED is fitted, it indicates voltage presence to the coil. If coil voltage is present, but the relay does not operate, a short circuit of the suppression diode is possible (This may have been reversed due to the coil connection).

Relays can easily be tested with the Mors Smitt Relay Tester. More information on: [www.morssmitt.com](http://www.morssmitt.com).

If the relay doesn't work after inspection, replace the relay unit with a similar model. Do not attempt to open the relay cover or try to repair. Contacts are calibrated and in balance, touching can affect proper operation. Also resoldering may affect correct operation. Since 2009 relays have tamper proof seals fitted and once broken, warranty is void.

Most relay defects are caused by installation faults such as overvoltage, spikes/transients, high/short current far exceeding the relay specifications. When returning the relays for investigation, please provide all information on the RMA form. Send defective relays back to the manufacturer for repair or replacement. Normal wear and tear or external causes are excluded from warranty.

RMA procedure see [www.morssmitt.com](http://www.morssmitt.com)

## Instantaneous relay

### D-B-relay

### Ordering scheme

D-		-		
Options (add as many options as needed)	<b>B</b>		Magnetic arc blow-out	
	<b>C</b>		Low temperature (-40 °C)	
	<b>D</b>		Back EMF diode (standard in DC coil)	
	<b>E</b>		Gold plated contacts	
	<b>V</b>		Wider operation range and ambient temperature	
	<b>W013</b>		Weld no transfer, 1 NC / 3 NO (see separate datasheet D-W)	
	<b>W022</b>		Weld no transfer, 2 NC / 2 NO (see separate datasheet D-W)	
	<b>W031</b>		Weld no transfer, 3 NC / 1 NO (see separate datasheet D-W)	
	<b>Y</b>		Double make double break contacts	
	<b>Z</b>		No diode, no LED	
	Special options (minimum order quantity: 20)	<b>A</b>		Trip indicator
		<b>H</b>		High burden protection
		<b>K</b>		Cover sealed, dust protection, IP50
		<b>M</b>		AgSnO <sub>2</sub> contacts, highly resistant to welding
<b>P</b>			Polarisation diode	
<b>R</b>			Fast switching 3 C/O contacts	
<b>R4</b>			Fast switching 4 C/O contacts	
<b>S</b>			Mechanical position indicator	
<b>T</b>			Push-to-test-button	
<b>X</b>			Bidirectional LED	
<b>X2</b>			Rectifier circuit	
<b>X3</b>			Reversed polarity	
<b>X4</b>			Make before break contacts	
<b>X5</b>			Contact gap 2 mm	
<b>11</b>		Make before break contact		
Coil voltages (Other voltages on request)			<b>6 VDC</b> <b>12 VDC</b> <b>30-32 VDC</b> <b>48 VDC</b> <b>60 VDC</b> <b>72 VDC</b> <b>100 VDC</b> <b>110 VDC</b> <b>120-125 VDC</b> <b>220 VDC</b> <b>250 VDC</b> <b>6 VAC 50 Hz</b> <b>24 VAC 50 Hz</b> <b>42 VAC 50 Hz</b> <b>60 VAC 50 Hz</b> <b>100-115 VAC 50 Hz</b> <b>127 VAC 50 Hz</b> <b>220-230 VAC 50 Hz</b> <b>230-240 VAC 50 Hz</b> <b>380-400 VAC 50 Hz</b> <b>24 VAC 60 Hz</b> <b>42 VAC 60 Hz</b> <b>110-115 VAC 60 Hz</b> <b>120-127 VAC 60 Hz</b> <b>220 VAC 60 Hz</b> <b>230-240 VAC 60 Hz</b> <b>380 VAC 60 Hz</b>	

Example: D-YB 220 VDC

Description: D-relay, Unom: 220 VDC, double make double break contacts, magnetic arc blow-out.

**Instantaneous relay**  
**D-B-relay**

**Mors Smitt Asia Ltd.**  
Unit B & C, 25/F., Casey Aberdeen House  
38 Heng Yip Road, Wong Chuk Hang  
Hong Kong  
Tel: +852 2343 555  
sales.msa@wabtec.com

**Mors Smitt France SAS**  
2 Rue de la Mandinière  
72300 Sablé-sur-Sarthe, France  
Tel: +33 (0) 243 92 82 00  
sales.msf@wabtec.com

**Mors Smitt UK Ltd.**  
Graycar Business Park,  
Burton on Trent, DE13 8EN, UK  
Tel: +44 (0)1283 357 263  
sales.msuk@wabtec.com

**Wabtec Netherlands B.V.**  
Vrieslantlaan 6,  
3526 AA, Utrecht, Netherlands  
Tel: +31 (0)30 288 1311  
sales.msbv@wabtec.com

**Mors Smitt Technologies Ltd.**  
1010 Johnson Drive,  
Buffalo Grove, IL 60089-6918, USA  
Tel: +1 847 777 6497  
salesmst@wabtec.com

**RMS Mors Smitt**  
6 Anzed Court,  
Mulgrave, VIC 3170, Australia  
Tel: +61 (0)3 8544 1200  
sales.rms@wabtec.com

(c) Copyright 2018

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.