

TTBCR 400 relay - Delay-on drop-out, Datasheet **instantaneous**



Description

The TTBCR 400 time delay relay has 4 changeover simple break contacts with 2 instantaneous contacts and 2 delayed contacts on drop-out fully programmable (with dipswitch) from 0.5 to 4 seconds. The access to dip switch is available by removing time delay cover. This feature prohibits frivolous field time delay setting.

The plug-in design offers secure locking feature for maximum ease of maintenance (no wires need to be disconnected or other hardware removed for relay inspection or replacement). The resistance to impact and vibration is conform to standards in force for Railway Transported Equipment.

Positive mechanical keying of relay to socket is built into relay and socket during manufacture and terminal identifications are clearly marked on identification plate that is permanently attached to the relay.

Application

The TTBCR 400 timing relay is designed for applications with a programmable timing function and instantaneous contacts used for example in HVAC and lighting.

Features

- Delay-on drop-out and instantaneous functions
- Delay range from 0.5 s up to 4 s (other on request up to 60 s)
- Time delay fully programmable by dip switch
- Status LED indicator
- Plug-in design with secure locking feature for maximum ease of maintenance
- 4 simple break C/O contacts (form C), 6 A with 2 instantaneous C/O and 2 delayed contacts on drop-out
- Weld no transfer contacts
- Contact life (mechanical) of 10 million cycles
- -40 °C...+85 °C operating temperature

Benefits

- Proven reliable
- Long life cycle
- Accurate timing selection finger safe
- Easy to maintain and replace
- Low life cycle cost
- No maintenance

Railway compliancy

- NF F 62-002 Rolling stock - Instantaneous relays contacts and sockets
- NF F 16-101/102 Fire behaviour - Railway rolling stock
- EN 50155 Railway application - Electronic equipment used on rollin stock
- IEC 61373 Railway application - Shock and vibration tests



TTBCR 400 relay

Technical specifications



Functional and connection diagrams

Timing diagram	Relay pin correspondence
	<p>Relay pin correspondence</p> <p>Example: KP keying</p>

Connection diagram											
	<p>Dip switch setting</p> <ul style="list-style-type: none"> - Set DS 1 to in ON or OFF position - The time setting can only be the value of one dipswitch ON. Timing cannot be the sum of each dipswitch ON <table border="1"> <thead> <tr> <th>DS no</th> <th>Delay time</th> </tr> </thead> <tbody> <tr> <td>DS 1</td> <td>OFF 0.5 s</td> </tr> <tr> <td>DS 2</td> <td>OFF 1 s</td> </tr> <tr> <td>DS 3</td> <td>OFF 2 s</td> </tr> <tr> <td>DS 4</td> <td>ON 4 s</td> </tr> </tbody> </table> <p>Example: The sample dip switch above is set to 4 s</p>	DS no	Delay time	DS 1	OFF 0.5 s	DS 2	OFF 1 s	DS 3	OFF 2 s	DS 4	ON 4 s
DS no	Delay time										
DS 1	OFF 0.5 s										
DS 2	OFF 1 s										
DS 3	OFF 2 s										
DS 4	ON 4 s										



TTBCR 400 relay

Technical specifications

Time characteristics

Time function	Delay-on drop-out and instantaneous
Total time delay range	0.5 s...4 s
Time delay adjustment	Fixed after setting the dip switch (access available by removing relay cover)
Adjustment / repeatability accuracy	< 2% (td > 5 s), < 10% (td = 0.25 s...5 s), 0.1% (td = time delay)

Coil data

Keying	U _{nom} (VDC)	U _{operating} (VDC)	P _{nom} (W)	R coil (Ω) ⁽¹⁾	L/R (ms) ⁽²⁾
AN	24	16 / 33	2	1555	6
HP	36	25 / 45	2	3300	6
CN	48	33 / 60	2	6100	6
DN	72	48 / 90	2	12400	6
MP	96	65 / 120	2	22200	6
LW	110	75 / 138	2	22200	6

(1) Coil resistance tol.: ± 8% at 20 °C

(2) Valid for closed relay

Contact data - standard version (Ag contacts)

Nominal current	6 A resistive
Nominal breaking capacity and life	1 A at 72 VDC L/R : 0 ms Electrical life: 1x10 ⁶ op.
	0.550 A at 72 VDC L/R: 15 ms Electrical life: 0.5x10 ⁶ op.
	Lamp filament circuit: 120 W at 72 VDC Electrical life: 0.2x10 ⁶ op.
Number of contacts	4 simple break contacts (form C)(2 instantaneous + 2 time delay)
Contact material	Ag + 0.2 μm AU
Contact resistance	15 mΩ max



TTBCR 400 relay

Technical specifications

Electrical characteristics

Dielectric strength	1500 VAC, 1 min between contacts 2600 VAC, 1 min between contacts, coil and frame
Insulation resistance	≥ 1000 MΩ at 500 VDC

Mechanical & environmental characteristics


Vibration	NF F 62-002 The tests are conducted in the X, Y , Z planes at frequency between 10 & 150 cycles (sinusoidal) at 2 g
Shock	NF F 62-002 Tests are applied in both directions in the X, Y & Z planes. Then successive shocks are administered consisting of the positive component of sinusoidal with a value of 30 g, 11 ms Other vibration and shock tests can be performed on request
Mechanical life	10 x 10 ⁶ operations
Weight	200 g
Temperature	-40 °C...+85 °C
Humidity	93% RH, 40° C for 4 days
Salt mist	5% NaCl, 35° C for 4 days
Protection	IP40 (timing relay on socket)
Fire & smoke	Materials: Polycarbonate (cover) / polyester melamine (base) Note: These materials have been tested for fire propagation and smoke emission according standards NF F 16-101, NF F 16-102.



TTBCR 400 relay

Technical specifications


Dimensions (mm)

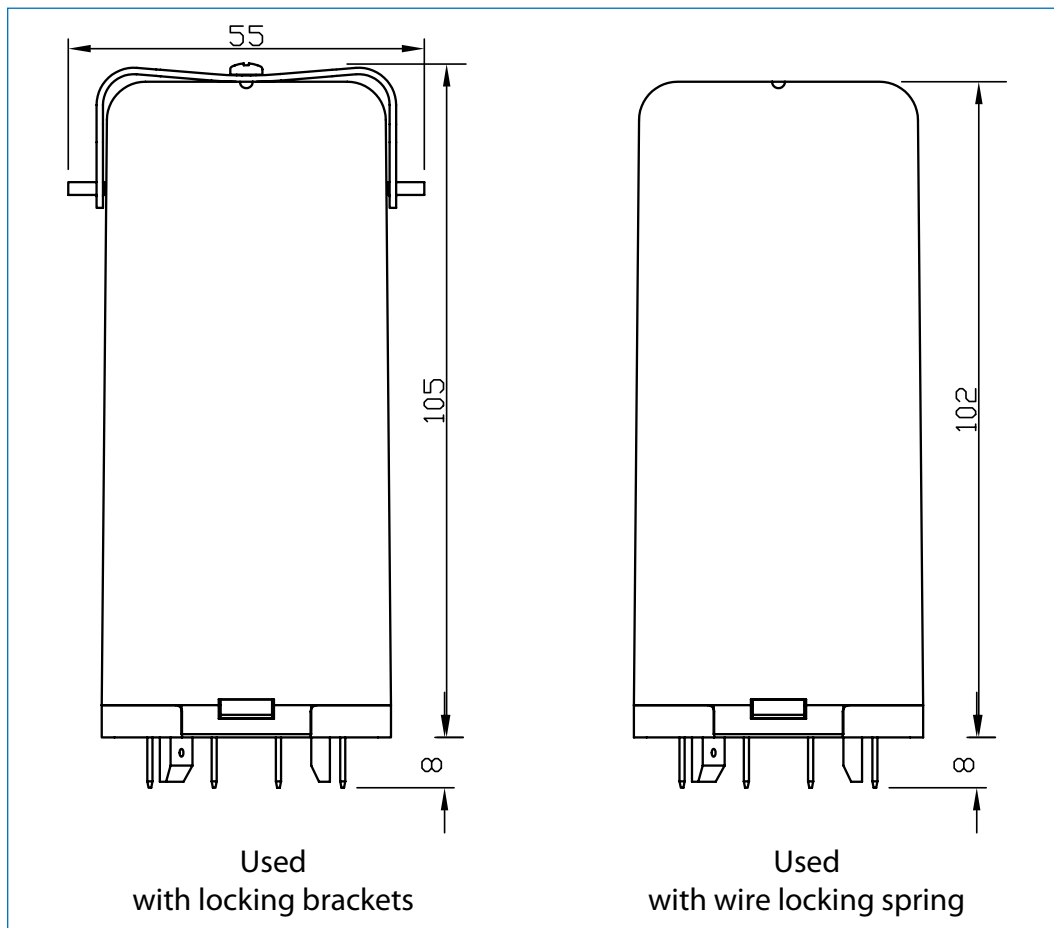

TTBCR 400 relay

Technical specifications


Dynamic relay selection curve No 1

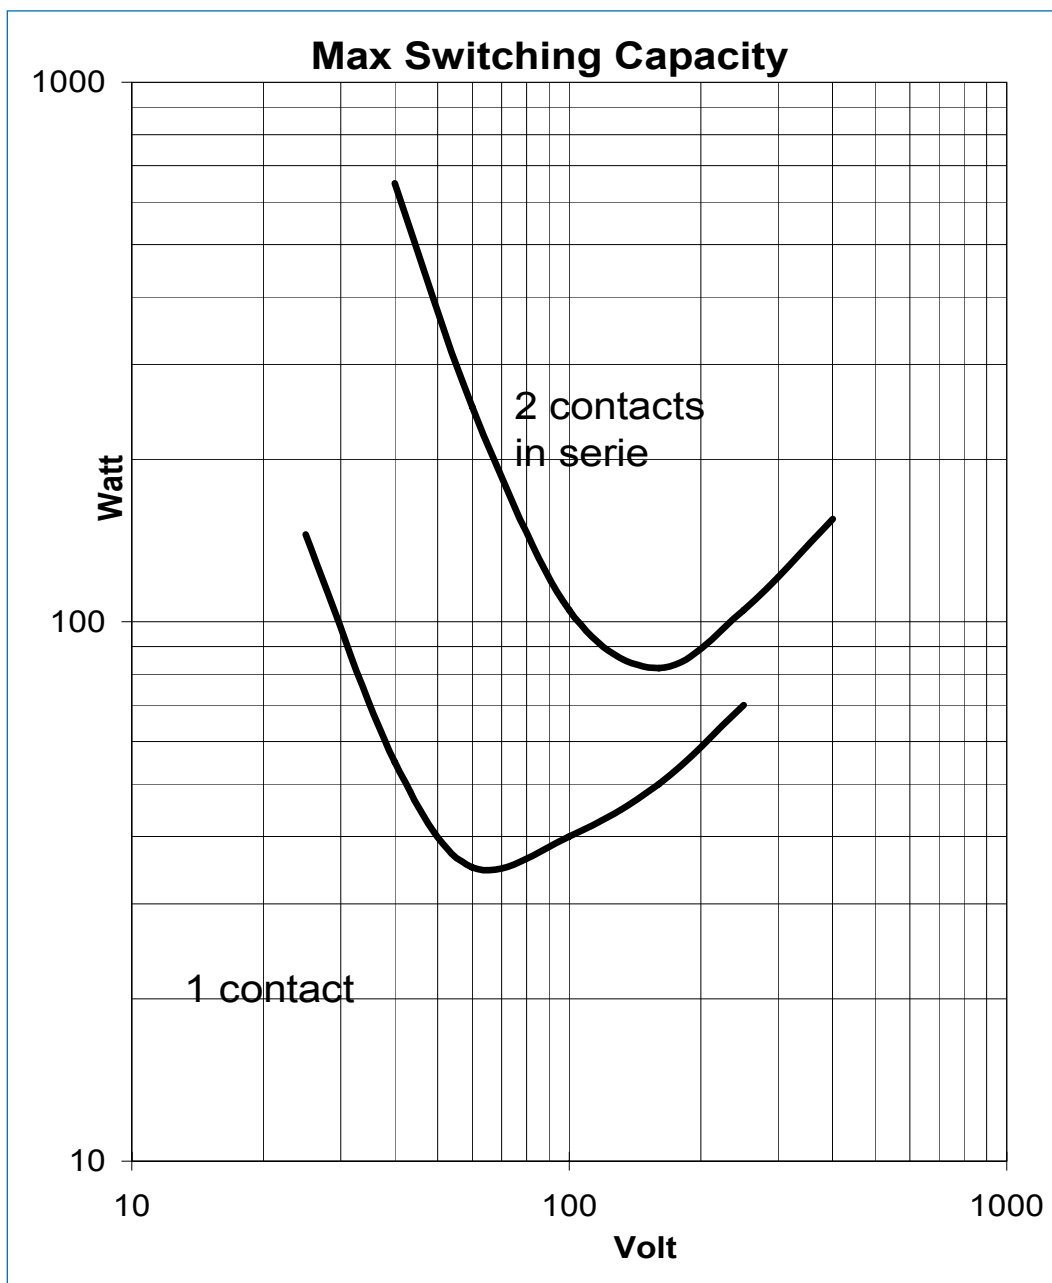

TTBCR 400 relay

Technical specifications

Dynamic relay selection curve No 2

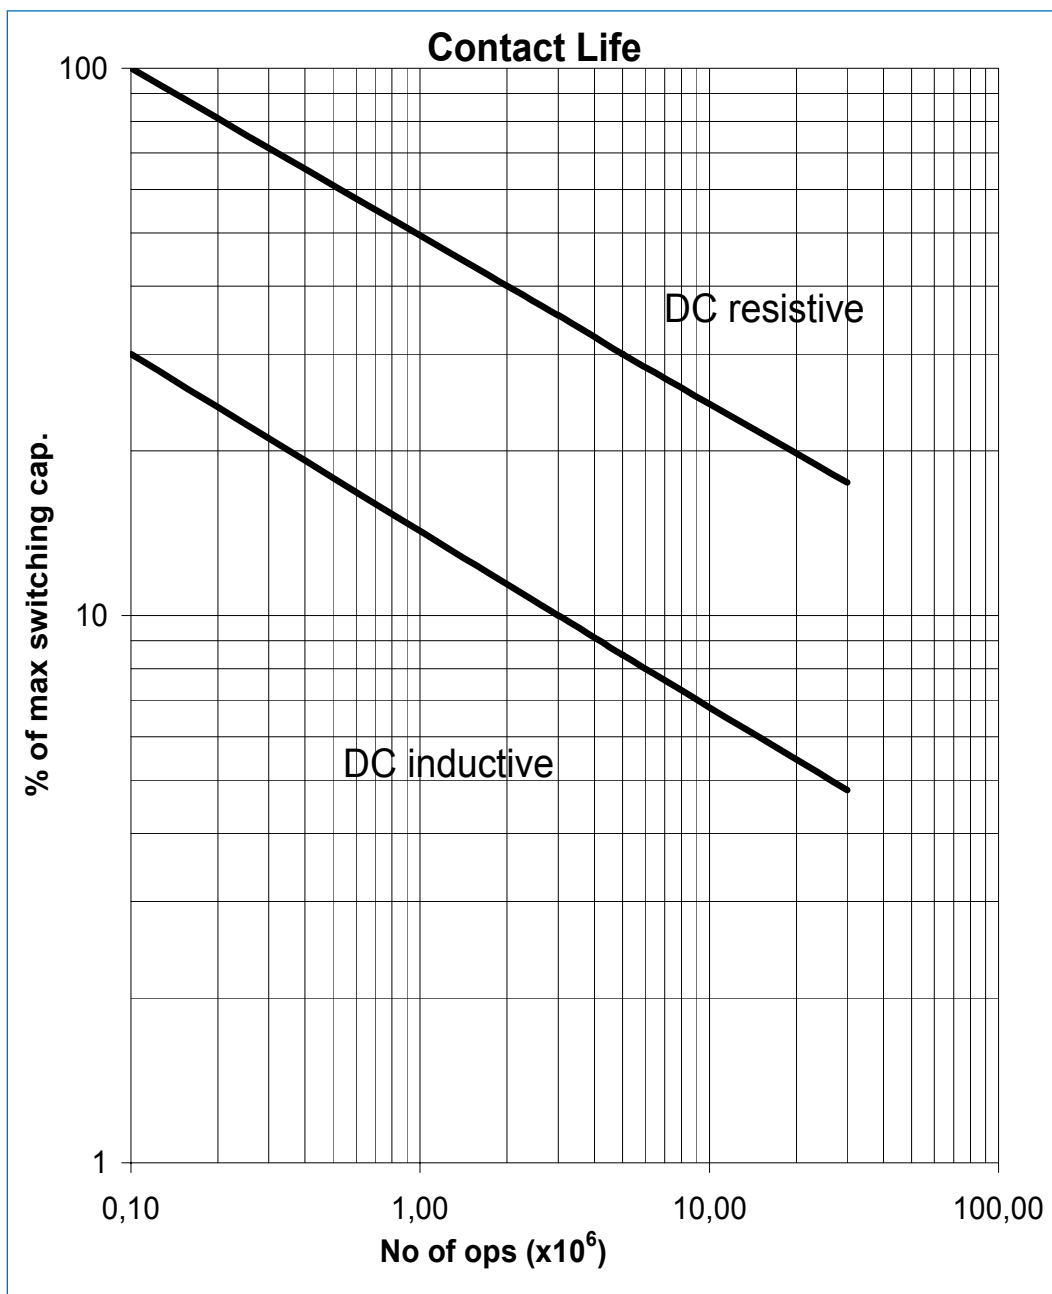

TTBCR 400 relay

Mounting possibilities / sockets



EA 102 B



EA 103 BF



EA 104 B



EA 112 BF

Panel/flush mounting

EA 102 B	Locking bracket (905843), rear connection, double Faston 5 mm
EA 102 BF	Wire locking spring (926853), rear connection, single Faston 5 mm
EA 104 B	Locking bracket (905843), rear connection, single Faston 5 x 0.8 mm
EA 104 BF	Wire locking spring (926853), rear connection, single Faston 5 x 0.8 mm
EA 112 BF	Wire locking spring (926853), rear connection, crimp contact

Surface/wall mounting

EA 103 BF*	Wire locking spring (926853), front connection, M3 screw 6.5 mm ring terminals (2.5 mm ²)
EA 105 BF*	Wire locking spring (926853), front connection, single Faston 5 mm

* Mounting possibility on 35 mm rail EN 50022 by adding suffix D to the part number (see socket datasheet)









Note: Keying of relay to socket can be specified by adding the keying letters in the part number. See all details in the related socket datasheet.



TTBCR 400 relay

Spare parts

Spare parts - order part numbers

<p>(1)</p>  <p>LOCKING BRACKET 905846</p>	<p>(1)</p>  <p>SCREW FOR BRACKET C927210</p>	<p>(1)</p>  <p>METAL STRAP (2) P928060</p>	<p>(1)</p>  <p>METAL STRAP (4) P928061</p>
<p>(1)</p>  <p>WIRE LOCKING SPRING 431906654</p>	<p>(1)</p>  <p>ROUND PLASTIC PLUGS 414928005</p>	<p>(2)</p>  <p>HEX. PLASTIC KEYS 414905678</p>	<p>(3)</p>  <p>LOCK PINS ASSY 2 SCREWS 906364 212903020</p>

(1) Parts only for socket
 (2) Parts for relay and socket
 (3) Parts only for relay



TTBCR 400 relay

Instructions

Installation

Install socket and connect wiring correctly according identification to terminals. Plug relay into socket. Reverse installation into socket not possible due to mechanical blocking by snap-lock.

Don't reverse polarity of coil connection. Relays can be mounted tightly next to each other.

Warning! Never use silicon near by relays

Operation

Before operating always apply voltage to coil to check correct operation.

Long term storage may corrode the silver on the relay pins. Just by plugging the relay into the socket, the female bifurcated receivers will automatically clean the corrosion on the pins and guarantee a good connection.

Do not use the relay in places with flammable gas as the arc generated from switching could ignite gasses.

Maintenance


Correct operation of relay can easily be checked as transparent cover gives good visibility on the moving contacts. When the relay doesn't seem to operate correct, please check presence of coil voltage. Use a multimeter. If LED is used, coil presence should be indicated. If coil voltage is present, but the relay doesn't work, a short circuit of suppression diode is possible (The coil connection was reversed). If relay doesn't work after inspection, please replace relay unit by a similar model. Send defective relay back to manufacturer. Normal wear and tear excluded.



TTBCR 400 relay

Ordering scheme

Configuration:

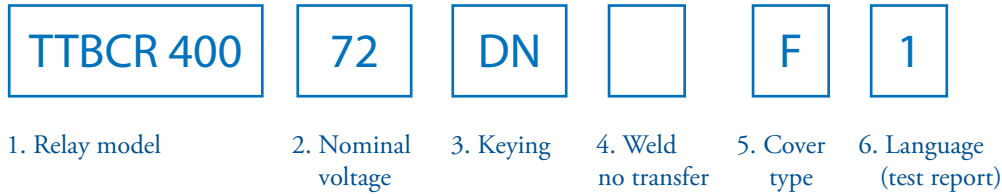

This example represents a **TTBCR 400 72 DN F 1**.

Description: TTBCR relay, U_{nom} : 72 VDC, Keying DN, relay cover for wire locking spring, test report in English

1. Relay model

TTBCR 400

2 & 3. Nominal voltage and keying

24 AN	24 VDC
36 HP	36 VDC
48 CN	48 VDC
72 DN	72 VDC
96 MP	96 VDC
110 LW	110 VDC

4. Weld no transfer option

Weld no transfer available (standard)

5. Relay cover type

–	Relay cover with lock pins
F	Relay cover for wire locking spring

6. Language on test report

–	French
1	English
2	Spanish





www.morssmitt.com



Mors Smitt France SAS

Tour Rosny 2, Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois Cedex, FRANCE
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001
E sales@msrelais.com

Mors Smitt Asia Ltd.

807, Billion Trade Centre, 31 Hung To Road
Kwun Tong, Kowloon, HONG KONG SAR
T +852 2343 5555, F +852 2343 6555
E info@morssmitt.hk

Mors Smitt B.V.

Vrieslantlaan 6, 3526 AA Utrecht,
NETHERLANDS
T +31 (0)30 288 1311, F +31 (0)30 289 8816
E sales.msbv@wabtec.com

Mors Smitt Technologies Inc.

420 Sackett Point Road
North Haven, CT 06473, USA
T +1 (203) 287 8858, F +1 (888) 287 8852
E mstechnologies@msrelais.com

Mors Smitt UK Ltd.

Doulton Road, Cradley Heath
West Midlands, B64 5QB, UK
T +44 (0)1384 567 755, F +44 (0)1384 567 710
E sales.msuk@wabtec.com